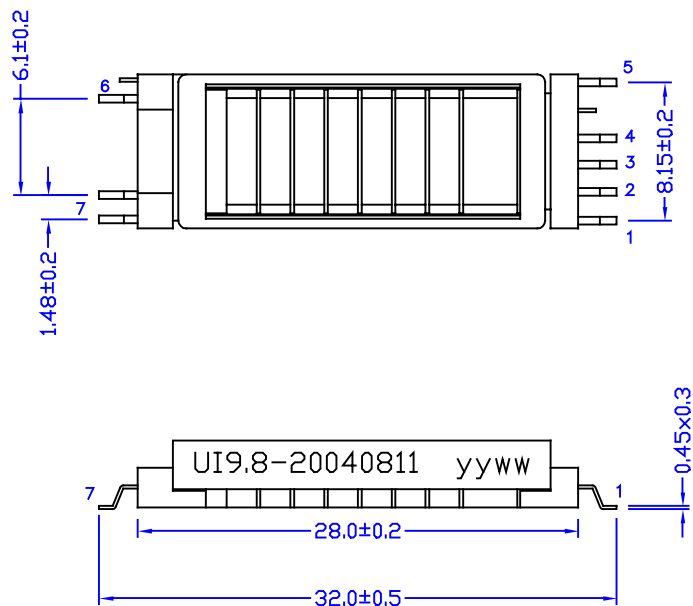


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-4 = $0.104 \text{ OHM} \pm 20\%$.
PIN 5-6 = $734 \text{ OHM} \pm 15\%$.
- INDUCTANCE (@1KHZ, 1Vrms) :
PIN 5-6 = $610 \text{ mH} \pm 20\%$.
- LEAKAGE INDUCTANCE (@50KHZ, 1Vrms) :
PIN 5-6 (1-4 SHORT) = $270 \text{ mH} \pm 10\%$.
- HI-POT :
(@500VAC, 0.5mA, 1MIN) : PRI-SEC, PRI-CORE.
(@1600VAC, 0.5mA, 2S) : SEC-CORE.

NONE TOLERANCE FOR REFERENCE

						Atech®		TITLE
						Atech Technology Co., Ltd.		INVERTER
						TEL:02-2794-6667 FAX:02-2794-8004		DWG. NO.
A	MARKING	08/16/2004	BART	AL	SUEDY	UNITS:	SAFETY	ATC-04-056
	RELEASE	08/09/2004	BART	MICHAEL	SUEDY	M/M		SHEET 1 OF 1
NO	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW
REVISIONS						08/09/04		Pair