
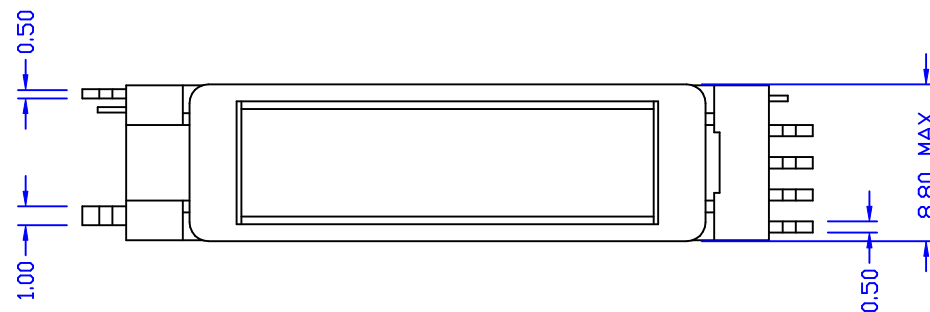


NONE TOLERANCE FOR REFERENCE

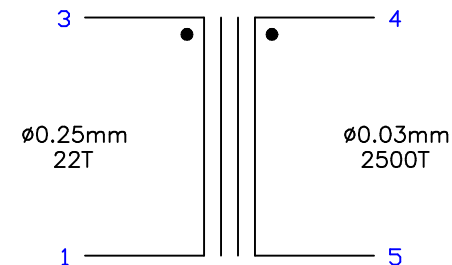

ELECTRICAL CHARACTERISTICS :

1. DCR : PIN 3-1 = 119 mΩH ±20%.
PIN 4-5 = 890 ΩH ±20%.
2. INDUCTANCE (@1KHZ, 1Vrms) :
PIN 3-1 = 67.3 uH ±20%.
PIN 4-5 = 837 mH ±20%.
3. LEAKAGE INDUCTANCE (@50KHZ, 1Vrms) :
PIN 4-5 = 297 mH ±10%.
4. HI-POT :
(@500VAC, 0.5mA, 1MIN) : PIR-SEC.
(@1600VAC, 0.5mA, 2S) : SEC-CORE.

ATTENTION ITEN WHEN OPERATING :
PLEASE USE THE OSCILLATION FREQUENCY WITH 50KHZ~80KHZ.
PLEASE USE THE VOLTAGE OUTPUTING OPEN WITH 1600Vrms OR LESS.

						Atech®		TITLE INVERTER	
						Atech Technology Co., Ltd.		DWG. NO. ATC-04-060	
						TEL:022794-6667 FAX:022794-8004			
RELEASE		09/06/2004	BART	PAKER	SUEDY	UNITS: M/M		SAFETY	
ND	DESCRIPTION	DATE	BY	CHK	APPD	DATE		SHEET 1 OF 1	
REVISIONS						09/06/04		DRAW Pair	