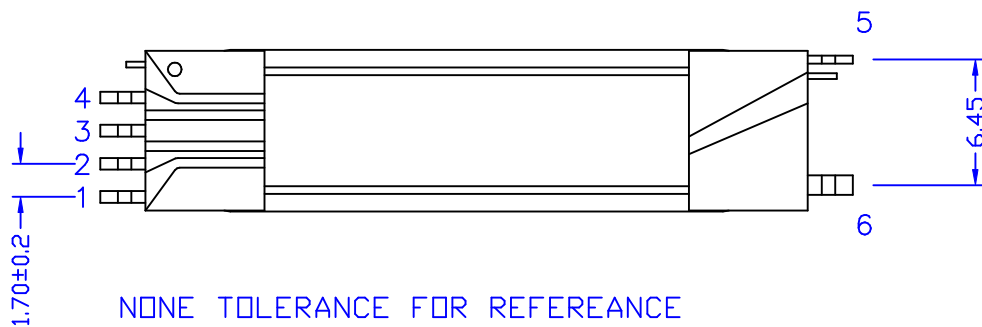
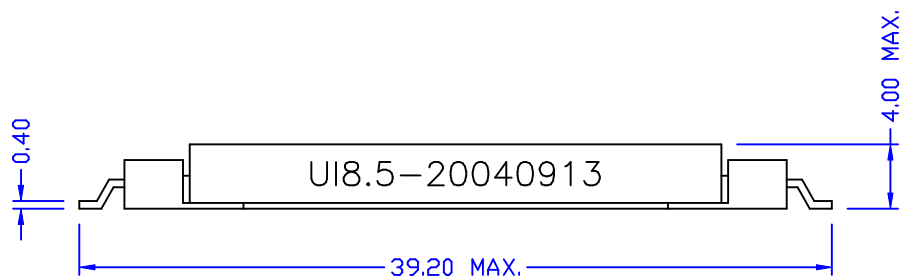
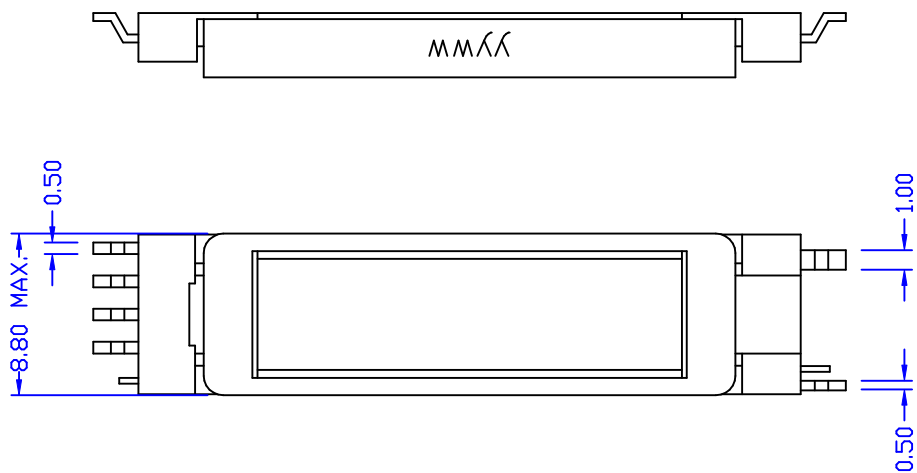


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 3-1 = 133 mΩHM ±20%.
PIN 4-5 = 894 ΩHM ±20%.
- INDUCTANCE (@1KHZ, 1Vrms) :
PIN 3-1 = 73.3 uH ±20%.
PIN 4-5 = 764 mH ±20%.
- LEAKAGE INDUCTANCE (@50KHZ, 1Vrms):
PIN 4-5 = 290 mH ±10%.
- HI-POT :
(@500VAC, 0.5mA, 1MIN) : PIR-SEC.
(@1600VAC, 0.5mA, 2S) : SEC-CORE.
- ROHS COMPLIANCE

ATTENTION ITEN WHEN OPERATING :
PLEASE USE THE OSCILLATION FREQUENCY WITH 50KHZ~80KHZ.
PLEASE USE THE VOLTAGE OUTPUTING OPEN WITH 1600Vrms OR LESS.

						Atech®		TITLE
						Atech Technology Co., Ltd.		INVERTER
						TEL:0212794-6667 FAX:0212794-8004		DWG. NO.
								ATC-04-060AR
RELEASE		07/26	PAIR	AL	SUEDY	UNITS:	SAFETY	
		2005				M/M		
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	SHEET 1 OF 1	
REVISIONS						07/26/05	DRAW	
								Pair