
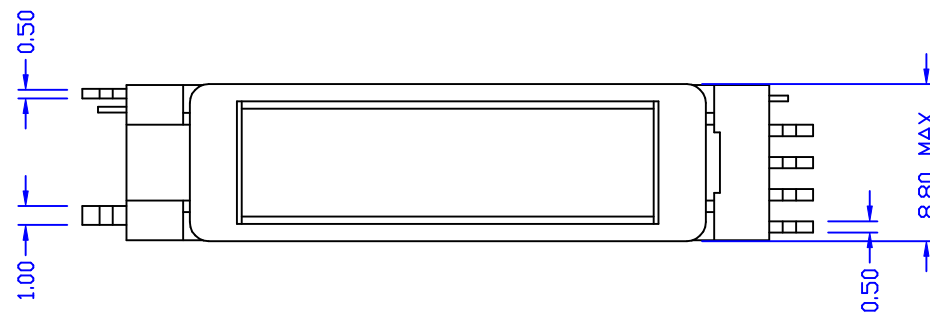


NONE TOLERANCE FOR REFERENCE

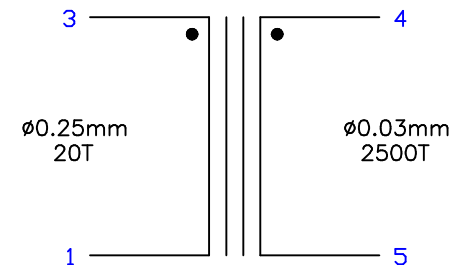

ELECTRICAL CHARACTERISTICS :

1. DCR : PIN 3-1 = 111 mΩHM ±20%.
PIN 4-5 = 893 ΩHM ±20%.
2. INDUCTANCE (@1KHZ, 1Vrms) :
PIN 3-1 = 46.4 uH ±20%.
PIN 4-5 = 693 mH ±20%.
3. LEAKAGE INDUCTANCE (@50KHZ, 1Vrms):
PIN 4-5 = 297 mH ±10%.
4. HI-POT :
(@500VAC, 0.5mA, 1MIN) : PIR-SEC.
(@1600VAC, 0.5mA, 2S) : SEC-CORE.

ATTENTION ITEN WHEN OPERATING :
PLEASE USE THE OSCILLATION FREQUENCY WITH 50KHZ~80KHZ.
PLEASE USE THE VOLTAGE OUTPUTING OPEN WITH 1600Vrms OR LESS.

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE INVERTER	
								DWG. NO. ATC-04-060	
	RELEASE	09/09/2004	BART	PAKER	SUEDY	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE 09/09/04			DRAW <i>Pair</i>
REVISIONS									