

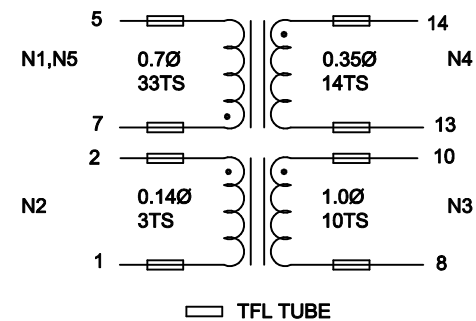


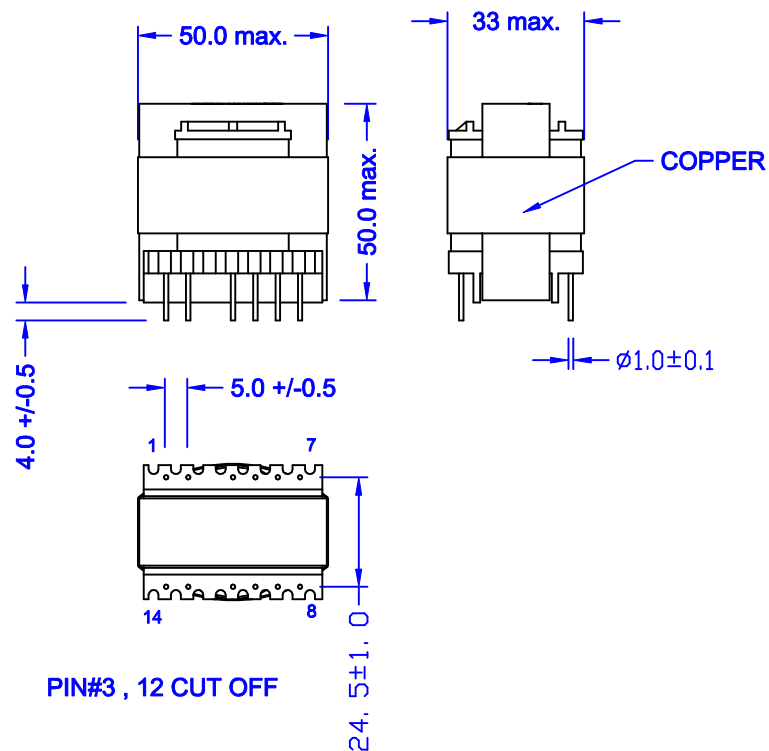

Marking or Label



ELECTRICAL CHARACTERISTICS:

- INDUCTANCE : (@1KHz 0.25V)
L : (7-5) 308 uH +/-10%
LK : (7-5) 8uH MAX. PIN 1+2(8+10+13+14) SHORT
- DCR :
R: (7-5) : 80m OHM MAX. R: (14-13) : 287m OHM MAX.
R: (10-8) : 34m OHM MAX. R: (2-1) : 380 m OHM MAX.
- HI-POT : (@ 50Hz 5mA 3SEC.)
P-S : 3.75KV AC P-C : 3.75KV AC
S-C : 1.8KV AC
- INSULATION :
PRI-SEC/PRI-CORE/SEC-CORE . 100m OHM MIN. @ 500VDC

None tolerance for reference

						Atech® Atech Technology Co., Ltd. TEL: (02)2794-6887 FAX: (02)2794-8004		TITLE SPS TRANSFORMER	
								DWG. NO. ATC-04-071	
A	ADD COPPER	11/15/2004	BART	AL	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1	
	RELEASE	10/20/2004	PAIR	ANGEL	SUEDY			DRAW <i>Pair</i>	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE	10/20/04		
REVISIONS									