
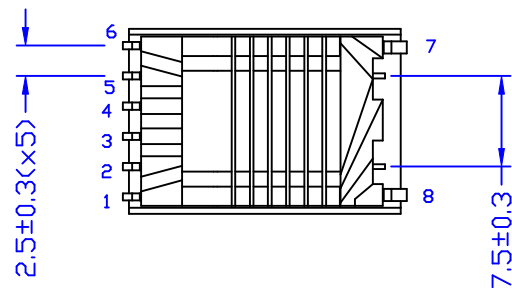
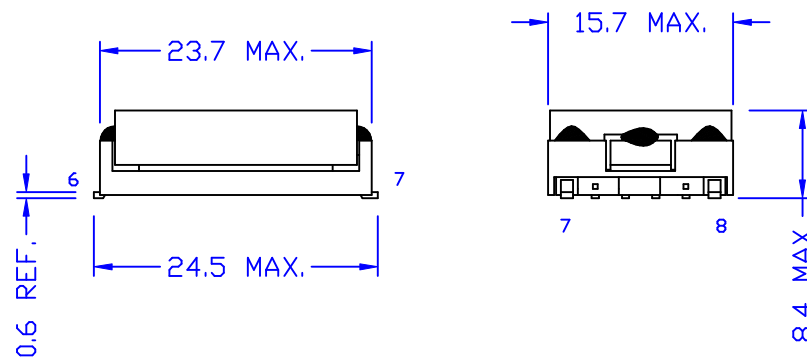


EPOXY(x6)

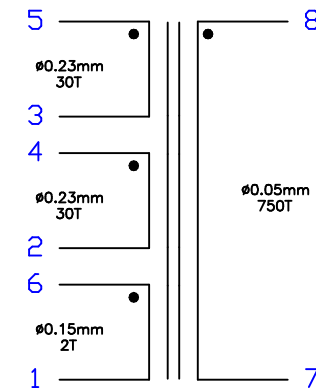

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 5-3 = 0.298 Ω HM $\pm$ 20%.
PIN 4-2 = 0.298 Ω HM $\pm$ 20%.
PIN 6-1 = 0.056 Ω HM REF.
PIN 7-8 = 150 Ω HM $\pm$ 20%.
- INDUCTANCE (@1KHZ, 0.25V) :
PIN 5-3 = 140uH $\pm$ 15%.
PIN 4-2 = 140uH $\pm$ 15%.
PIN 7-8 = 88mH $\pm$ 25%.
- HI-POT :
(@2000VAC, 0.5A, 2S) : SEC-CORE.

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004	TITLE INVERTER, TRANSFORMER	
							DWG. NO.	ATC-04-073
	RELEASE	11/19/2004	BART	PAKER	SUEDY		UNITS: M/M	SAFETY
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	SHEET 1 OF 1	
REVISIONS						11/19/04	DRAW	Pair