
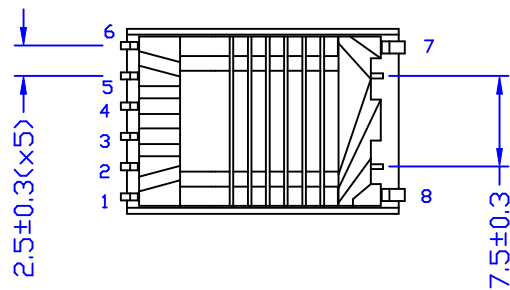
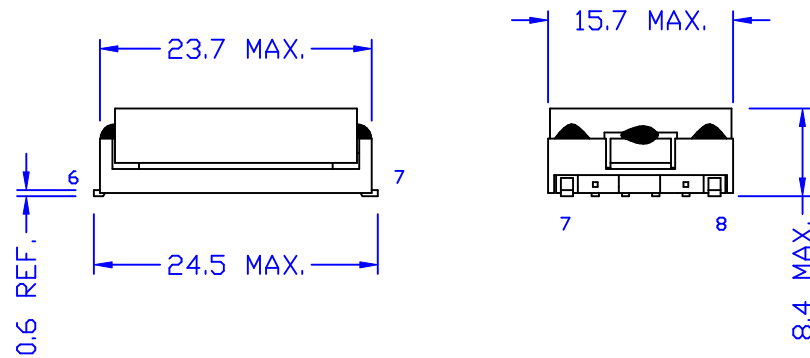


EPOXY(x6)

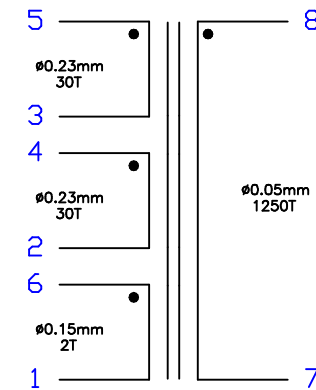

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 5-3 = 0.303 Ω M $\pm 20\%$.
PIN 4-2 = 0.302 Ω M $\pm 20\%$.
PIN 6-1 = 0.057 Ω M REF.
PIN 7-8 = 262.5 Ω M $\pm 20\%$.
- INDUCTANCE (@1KHZ, 0.25V) :
PIN 5-3 = 145.4 μ H $\pm 15\%$.
PIN 4-2 = 145.4 μ H $\pm 15\%$.
PIN 6-1 = 0.57 μ H REF.
PIN 7-8 = 248mH $\pm 25\%$.
- HI-POT :
(@2000VAC, 0.5A, 2S) : SEC-CORE.

						Atech®		TITLE INVERTER, TRANSFORMER	
						Atech Technology Co., Ltd.		DWG. NO.	
						TEL:022794-6667 FAX:022794-8004		ATC-04-074	
RELEASE		11/19/2004	BART	PAKER	SUEDY	UNITS: M/M		SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		SHEET 1 OF 1	
REVISIONS						11/19/04		DRAW Pair	