
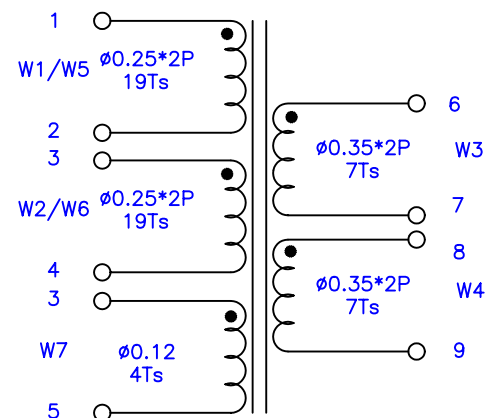
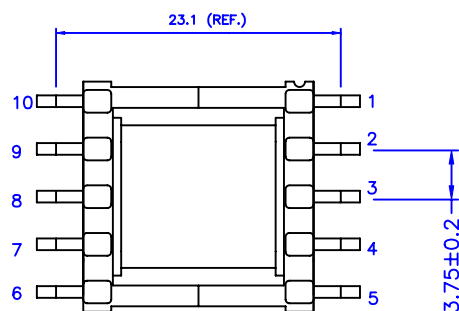

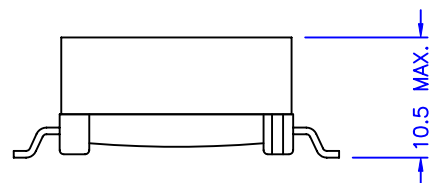


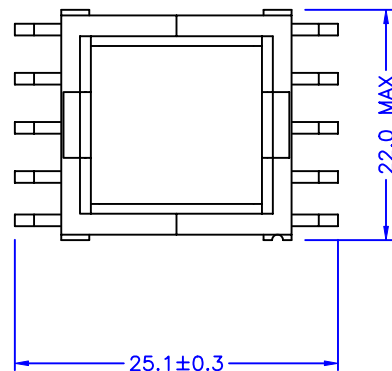

ELECTRICAL CHARACTERISTICS:

- DCR : PIN 1-4 (2-3 SHORT) = 300 mOHM MAX.
 PIN 6-7 = 35 mOHM MAX.
 PIN 8-9 = 35 mOHM MAX.
 PIN 3-5 = 350 mOHM MAX.
- INDUCTANCE (@1KHz, 0.25 Vrms) :
 PIN 1-4 (2-3 SHORT) = 1.3 mH $\pm 25\%$.
- TURN RATIO (@100KHz, 0.1Vrms) :
 PIN 1-4:6-7 = 5.42 $\pm 3\%$.
 PIN 1-4:8-9 = 5.42 $\pm 3\%$.
 PIN 1-4:3-5 = 9.5 $\pm 3\%$.
- HI-POT :
 (@0.8KVAC, 5mA, 1MIN) = PRI-SEC
 (@0.5KVAC, 5mA, 1MIN) = PRI-CORE
 (@0.5KVAC, 5mA, 1MIN) = SEC-CORE

F	DCR	04/20/2005	BART	ANDY	SUEDY	Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE TRANSFORMER	
E	SPEC.	03/29/2005	BART	ANDY	SUEDY		DWG. NO.	
D	PIN&SPEC&SCHEMATIC	02/19/2005	BART	AL	SUEDY		ATC-04-078	
	RELEASE	11/22/2004	BART	AL	SUEDY			
NO:	DESCRIPTION	DATE	BY	CHK	APPD	UNITS: M/M	SAFETY	SHEET 1 OF 1
REVISIONS						DATE 11/22/04		DRAW Pair