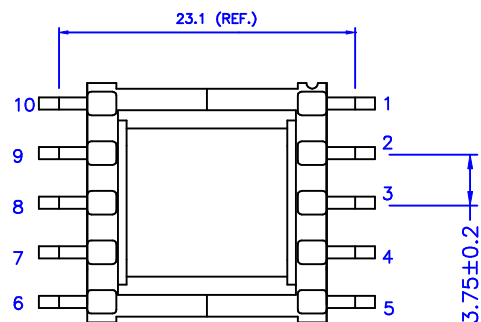
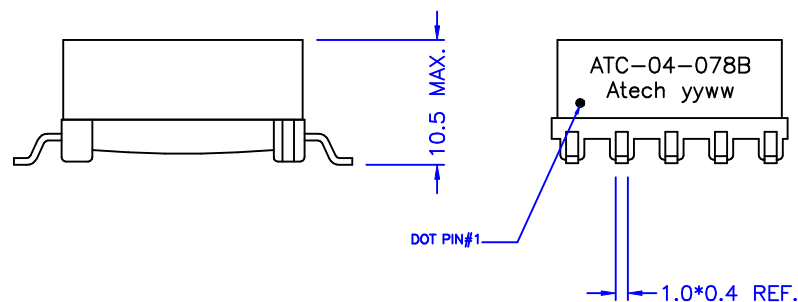
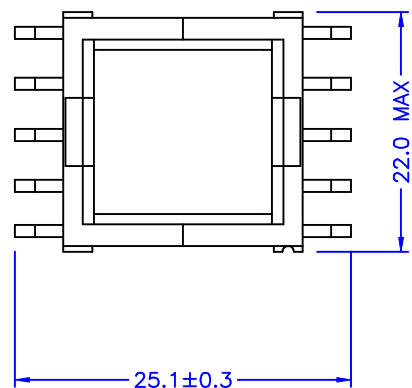


ELECTRICAL CHARACTERISTICS:

- DCR : PIN 1-4 = 320 mOHM REF.
PIN 2-5 = 20 mOHM REF.
PIN 7-9 = 12 mOHM TYP.
- INDUCTANCE (@100KHz, 0.1 Vrms) :
PIN 1-4 = 7.8 uH $\pm 20\%$.
PIN 2-5 = 11 uH $\pm 20\%$.
PIN 7-9 = 1.3 uH $\pm 20\%$.
- TURN RATIO (@3MHz, 1 Vrms) :
PIN 5-2:7-9 = 3 $\pm 2\%$.
PIN 4-1:7-9 = 2.5 $\pm 2\%$.
- HI-POT :
(@1500VAC, 1mA, 1MIN)
PRI-SEC

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004		TITLE	TRANSFORMER
								DWG. NO.	ATC-04-078B
a	2.1	02/08/2006	Pair	Eeflys	Eugene				
	RELEASE	10/13/2005	BART	MICHAEL	SUE DY	UNITS: M/M		SAFETY	SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE 10/13/05			DRAW Pair
REVISIONS									