
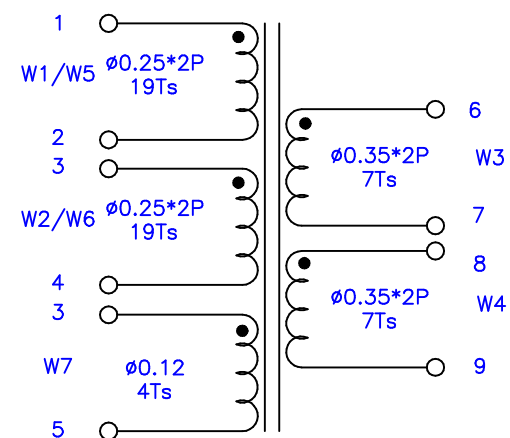
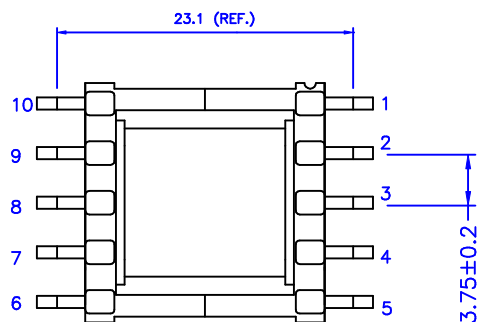


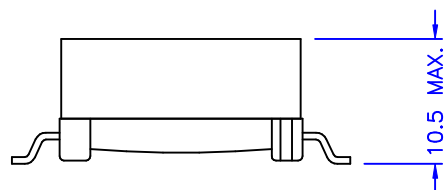


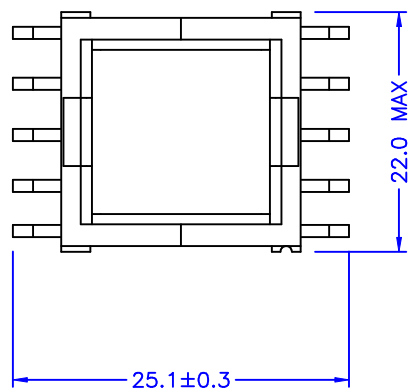

ELECTRICAL CHARACTERISTICS:

- DCR : PIN 1-4 (2-3 SHORT) = 300 mOHM MAX.
PIN 6-7 = 35 mOHM MAX.
PIN 8-9 = 35 mOHM MAX.
PIN 3-5 = 350 mOHM MAX.
- INDUCTANCE (@1KHz, 0.25 Vrms) :
PIN 1-4 (2-3 SHORT) = 1.3 mH $\pm 25\%$.
- TURN RATIO (@100KHz, 0.1Vrms) :
PIN 1-4:6-7 = 5.42 $\pm 3\%$.
PIN 1-4:8-9 = 5.42 $\pm 3\%$.
PIN 1-4:3-5 = 9.5 $\pm 3\%$.
- HI-POT :
(@0.8KVAC, 5mA, 1MIN) = PRI-SEC
(@0.5KVAC, 5mA, 1MIN) = PRI-CORE
(@0.5KVAC, 5mA, 1MIN) = SEC-CORE
- RoHS COMPLIANCE

						Atech® Atech Technology Co., Ltd. TEL: (02)2794-6667 FAX: (02)2794-8004		TITLE TRANSFORMER
								DWG. NO. ATC-04-078R
	RELEASE	02/13/2006	PAIR	AL	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE 02/13/06	P/N: CTW120006A	DRAW <i>Pair</i>
REVISIONS								