
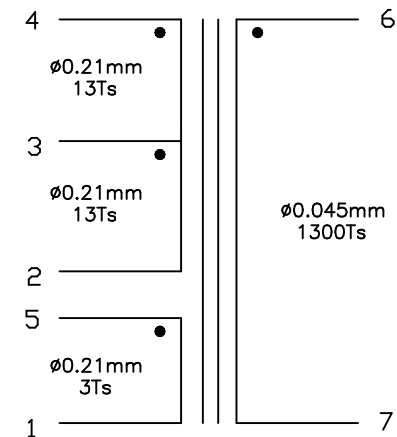


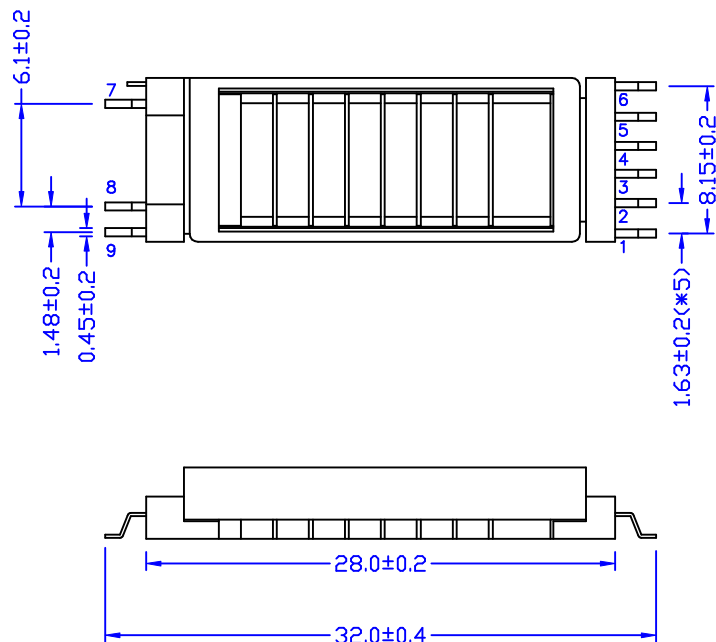

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 4-3 = $0.136 \text{ OHM} \pm 20\%$.
 PIN 3-2 = $0.135 \text{ OHM} \pm 20\%$.
 PIN 5-1 = $0.036 \text{ OHM} \pm 20\%$.
 PIN 6-7 = $258 \text{ OHM} \pm 20\%$.
- INDUCTANCE (@70KHZ, 0.25Vrms) :
 PIN 4-3 = $20.5 \text{ uH} \pm 20\%$.
 PIN 3-2 = $20.5 \text{ uH} \pm 20\%$.
 PIN 5-1 = 1.0 uH REF. .
 PIN 6-7 = $201 \text{ mH} \pm 15\%$.
- HI-POT:
 (@1200VAC, 3mA, 1MIN.) : PRI-SEC
 (@500VAC, 3mA, 1MIN.) : PRI-CORE
 (@1200VAC, 3mA, 1MIN.): SEC-CORE
- RoHS COMPLIANCE.

						Atech® Atech Technology Co., Ltd. TEL:02-2794-6667 FAX:02-2794-8004		TITLE INVERTER	
								DWG. NO. ATC-04-079R	
	RELEASE	01/06/2006	BART		SUEDY	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE			DRAW <i>Pair</i>
REVISIONS						01/06/06			