


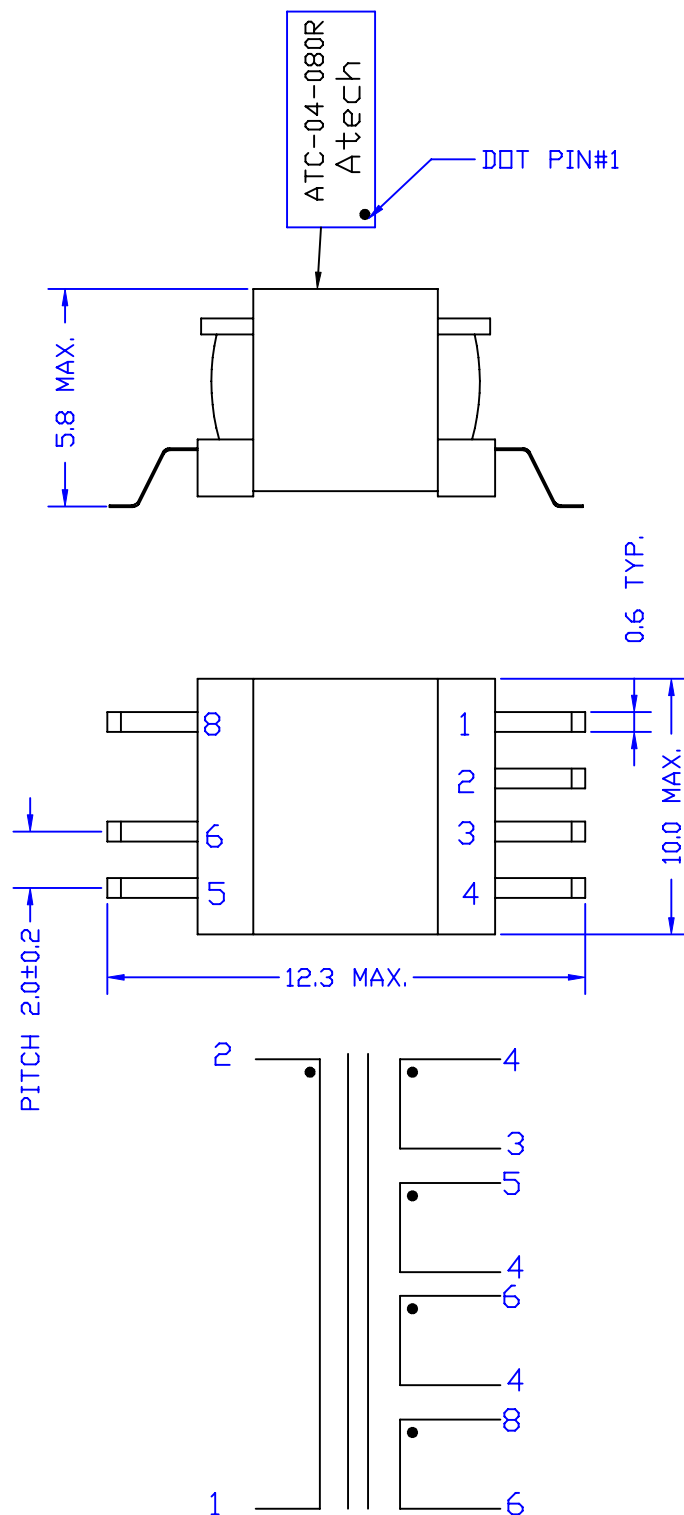

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-2 = 0.64 Ω HM MAX.
PIN 3-4 = 1.74 Ω HM MAX.
PIN 5-4 = 0.65 Ω HM MAX.
PIN 6-4 = 0.50 Ω HM MAX.
- INDUCTANCE (@1KHZ, 0.25 Vrms) :
PIN 1-2 = 200 μ H $\pm$ 10%.
- LEAKAGE INDUCTANCE (@1KHZ, 0.25 Vrms) :
PIN 1-2 (3-4-5-6-8 SHORT) = 17.9 μ M MAX.
- HI-POT (@500VAC, 1mA, 1SEC) :
PRI-SEC, PRI-CORE, SEC-CORE
- RoHS COMPLIANCE.

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-8867 FAX:(02)2794-8004	TITLE DC/DC	
							DWG. NO. ATC-04-080R	
RELEASE		01/06/2006	BART		SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N: CTW709001A	
REVISIONS						01/06/06		