
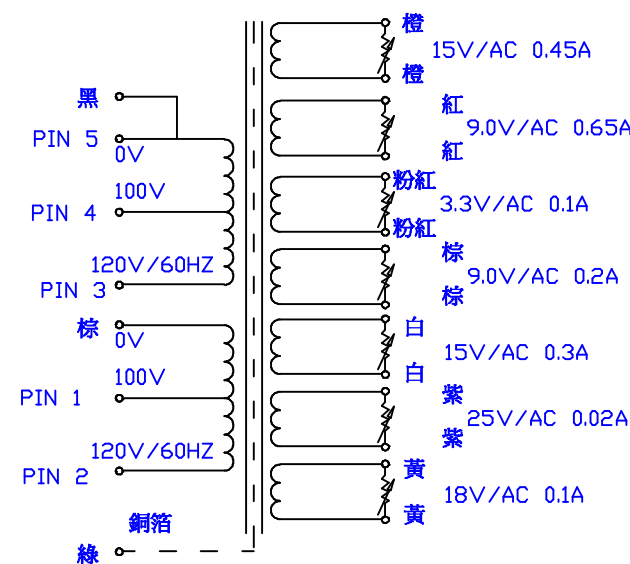
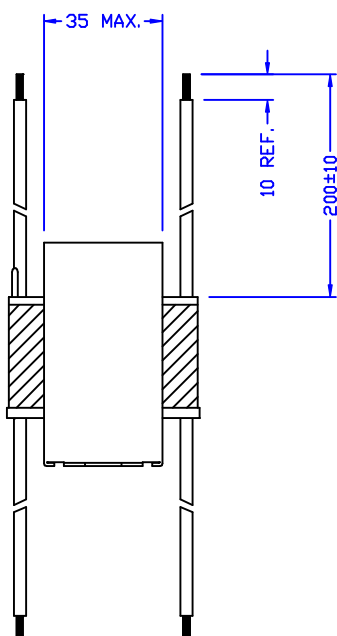
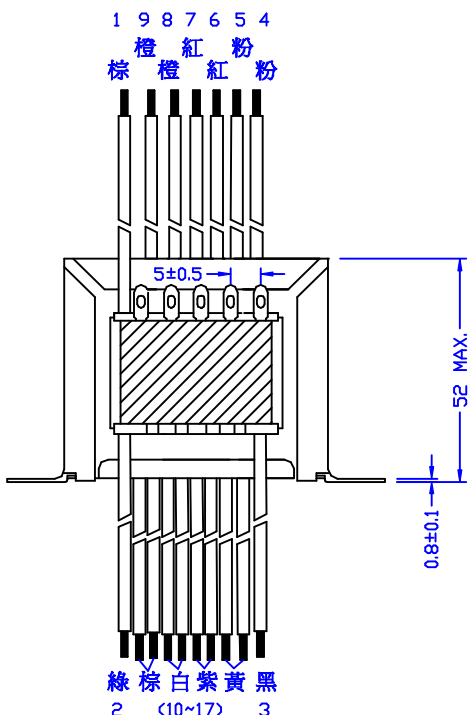


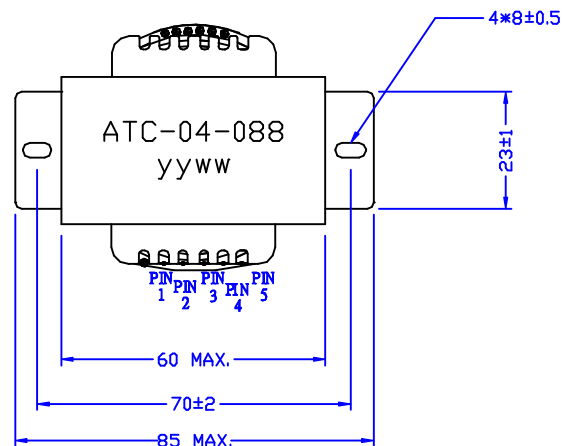

ELECTRICAL CHARACTERISTICS :

1. PRIMARY RATED VOLTAGE AND FREQUENCY : 120V 60Hz.
2. EXCITING CURRENT: INPUT PRIMARY 120V 60Hz 50mA MAX.
3. SECONDARY RATED VOLTAGE :

INPUT VOLTAGE	COLOR/PIN NO.	RATED VOLTAGE	RATED CURRENT	NOLoad VOLTAGE
120V/60HZ (黑-PIN3)	橙-橙	AC 15V±5%	0.45A	AC 17V±5%
	紅-紅	AC 9V±5%	0.65A	AC 10.3V±5%
	粉紅-粉紅	AC 3.3V±5%	0.1A	AC 13.75V±5%
	棕-棕	AC 9V±5%	0.2A	AC 10.4V±5%
	白-白	AC 15V±5%	0.3A	AC 17.3V±5%
	紫-紫	AC 25V±5%	0.02A	AC 27.8V±5%
	黃-黃	AC 18V±5%	0.1A	AC 20.5V±5%

4. HI-POT TEST : SHALL WITHSTAND WITHOUT BREAKDOWN
 ,INPUT 60Hz LEAKAGE CURRENT 5 mA/1MIN.
 1.5 KV FOR ONE MINUTE BETWEEN PRIMARY TO SECONDARY.
 1.0 KV FOR ONE MINUTE BETWEEN PRIMARY TO CORE.
 1.0 KV FOR ONE MINUTE BETWEEN SECONDARY TO CORE.

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8804		TITLE POWER TRANSFORMER	
								DWG. NO. ATC-04-088	
	RELEASE	02/25/2005	BART	AL	SUEDY	UNITS: M/M	SAFETY	SHEET 10F 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>	
REVISIONS						02/25/05			