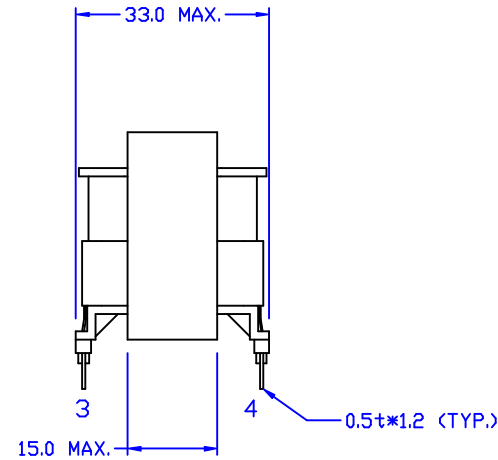
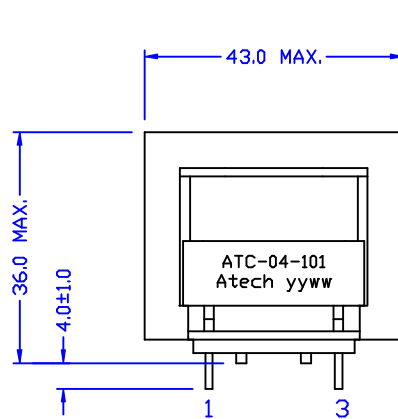
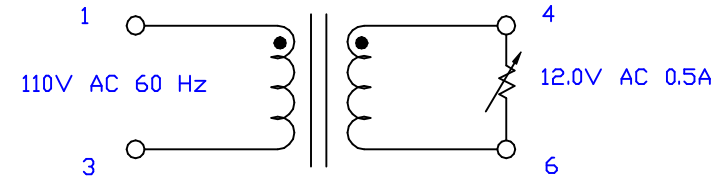
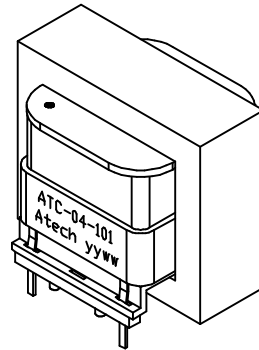



ELECTRICAL CHARACTERISTICS :

1. PRIMARY RATED VOLTAGE AND FREQUENCY : 110 V 60 Hz.
 2. EXCITING CURRENT : INPUT PRIMARY 110 V 60 Hz 65 mA MAX.
 3. SECONDARY RATED VOLTAGE :
- | INPUT VOLTAGE | COLOR/PIN NO. | RATED VOLTAGE | RATED CURRENT | NO LOAD VOLTAGE |
|---------------|---------------|---------------|---------------|-----------------|
| 110V/60Hz | 4-6 | 12.0VAC±5% | 0.5A | AC 13.5±5% |
4. HI-POT TEST : SHALL WITHSTAND WITHOUT BREAKDOWN ,
INPUT 50 Hz LEAKAGE CURRENT 5mA/1MIN.
1.5 KV FOR ONE MINUTE BETWEEN PRIMARY TO SECONDARY.
1.0 KV FOR ONE MINUTE BETWEEN PRIMARY TO CORE.
1.0 KV FOR ONE MINUTE BETWEEN SECONDARY TO CORE.
 5. INSULATION TEST : 500 VDC 100 M OHM MIN. BETWEEN WINDINGS AND WINDING AND CORE.
 6. TEMPERATURE RISE 65 °C MAX WITH LOAD SHOWN ON THE TEST CIRCUIT.
 7. INSULATION CLASS B

						Atech® Atech Technology Co., Ltd. TEL:0212794-6667 FAX:0212794-8004		TITLE POWER TRANSFORMER	
								DWG. NO. ATC-04-101	
	RELEASE	12/14/2004	BART	AL	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW Pair	
REVISIONS						12/14/04			