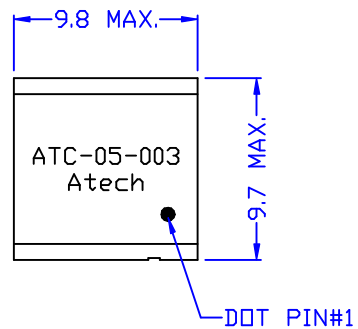


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-5 = 1.53 Ω HM $\pm 12\%$.
PIN 4-8 = 35.5 Ω HM $\pm 12\%$.
- INDUCTANCE (@10KHZ, 0.1Vrms) :
PIN 1-5 = 10.4 mH +40% / -30%.
PIN 4-8 = 1.04 H +40% / -30%.
- INSERTION LOSS (@30KHZ, 0.5Vrms) :
PIN 1-5 (4-8 W/H 10 KOHM) = 0.7 dB MAX.
- FREQ. RESP REF 30 KHZ :
10KHZ = ± 0.3 dB.
70KHZ = ± 0.3 dB.
- TURN RATIO (@30KHZ, 1Vrms) :
PIN 4-8:1-5 = 10 $\pm 1\%$.
- HI-POT (@500VAC, 1mA, 2S) : PIN 1-4

						Atech® Atech Technology Co., Ltd. TEL:02-2794-6667 FAX:02-2794-8804		TITLE 1:10 TRANSFORMER	
								DWG. NO. ATC-05-003	
	RELEASE	01/12/2005	BART	MICHAEL	SUEDY	UNITS: M/M	SAFETY	SHEET 10F 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 01/12/05			DRAW <i>Pair</i>
REVISIONS									