
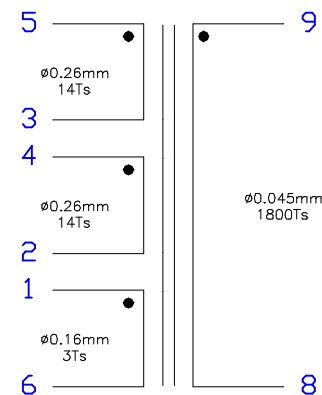
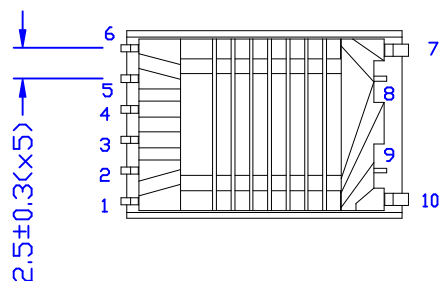



EPOXY(x6)

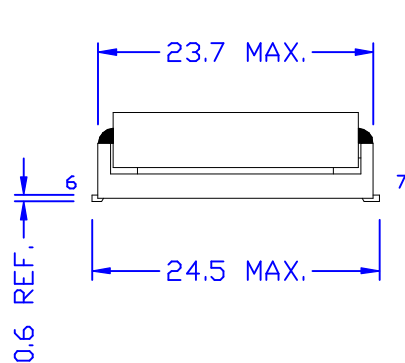

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 5-3 = 111 mΩHM ±15%.
PIN 4-2 = 110 mΩHM ±15%.
PIN 1-6 = 83 mΩHM REF.
PIN 8-9 = 471 ΩHM ±15%.
- INDUCTANCE (@1KHZ, 1Vrms) :
PIN 5-3 = 20uH ±15%.
PIN 4-2 = 20uH ±15%.
PIN 1-6 = 1.41uH REF.
PIN 8-9 = 310mH ±15%.
- HI-POT :
(@2000VAC, 0.5A, 2S) : SEC-CORE.

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE INVERTER, TRANSFORMER	
								DWG. NO. ATC-05-008	
	RELEASE	02/04/2005	BART	PAKER	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 02/04/05		DRAW <i>Pair</i>	
REVISIONS									