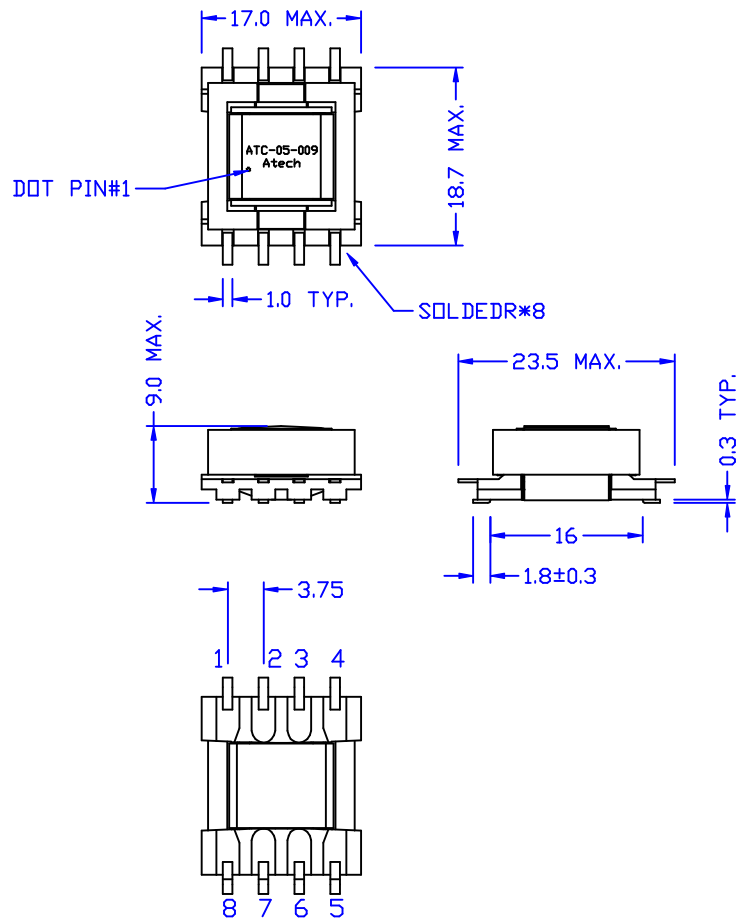


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = 1.2 Ω HM MAX.
PIN 2-4 = 0.08 Ω HM MAX.
PIN 5-7 = 0.05 Ω HM MAX.
PIN 6-8 = 0.05 Ω HM MAX.
- INDUCTANCE (@10KHZ, 0.1Vrms) :
PIN 1-4 (2-3 SHORT) = 1.2 mH +30%,-20%.
- LEAKAGE INDUCATNCE (@100KHZ, 0.1Vrms) :
PIN 1-4 (2-3, 5-7, 6-8 SHORT) = 10 μ H MAX.
- INTERWINDING CAP. (@100KHZ, 0.1Vrms) :
PIN 1-8 (2-3, 6-7 SHORT) = 80 pF MAX.
- TURN RAITO (150KHZ, 1Vrms) :
PIN 1-4:8-5 (2-3, 6-7 SHORT) = 2.75 $\pm$ 1%.
- HI-POT (@500VAC, 1mA, 2SEC) : PRI-SEC

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ± 0.25

						Atech® Atech Technology Co., Ltd. TEL:02-2794-6667 FAX:02-2794-8004		TITLE TRANSFORMER	
								DWG. NO. ATC-05-009	
	RELEASE	02/18/2005	BART	AARON	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>	
REVISIONS						02/18/05			