
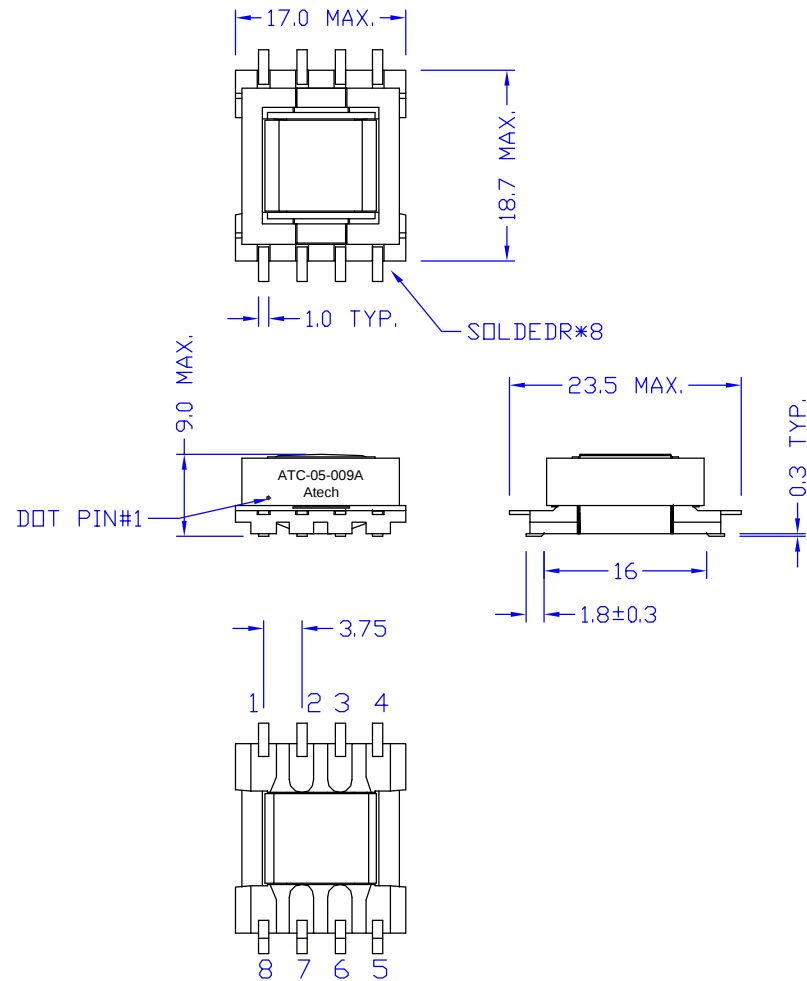


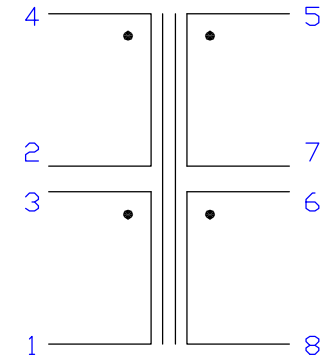

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 4-2 = 0.058 OHM MAX.
PIN 1-3 = 1.24 OHM MAX.
PIN 5-7 = 0.026 OHM MAX.
PIN 6-8 = 0.026 OHM MAX.
- INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 4-2 = 41 uH $\pm 5\%$.
PIN 1-3 = 41 uH $\pm 5\%$.
PIN 5-7 = 5.8 uH $\pm 5\%$.
PIN 6-8 = 5.8 uH $\pm 5\%$.
- TURN RAITO (10KHZ, 0.1Vrms) :
PIN 4-2:5-8 (6-7 SHROT) = 1.33 $\pm 2\%$.
PIN 4-2:3-1 = 1 $\pm 2\%$.
- HI-POT (@1500VAC, 1mA, 1MIN) :
PIN 4-5 (6-7 SHROT)

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ± 0.25

						Atech[®] Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004		TITLE TRANSFORMER
								DWG. NO. ATC-05-009A
	RELEASE	07/28/2005	BART	MICHAEL	SUE DY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>
REVISIONS						07/28/05		