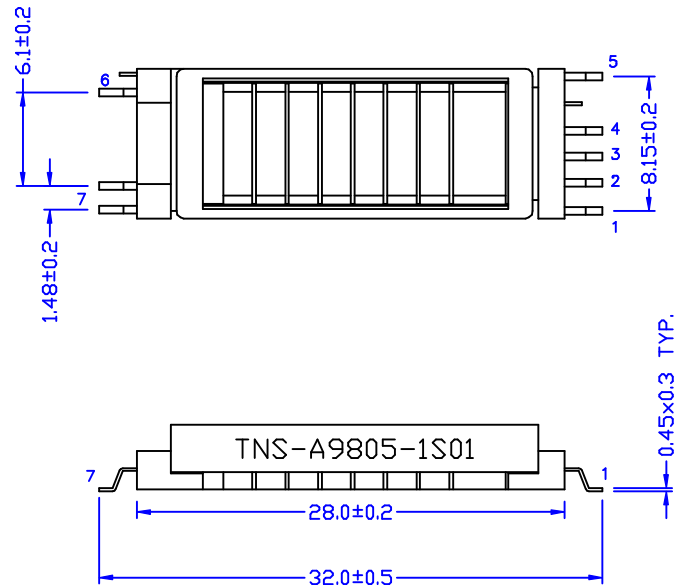


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 4-2 = 260 mOHM MAX..
PIN 5-6 = 820 OHM $\pm 20\%$.
- INDUCTANCE (@1KHZ, 1Vrms) :
PIN 4-2 = 137 uH $\pm 15\%$.
PIN 5-6 = 900 mH MIN.
- LEAKAGE INDUCTANCE (@50KHZ, 1Vrms) :
PIN 5-6 = 275 mH $\pm 15\%$.
- HI-POT :
(@500VAC, 0.5mA, 1MIN) : PRI-SEC
(@1500VAC, 0.5mA, 2S) : SEC-CORE

						Atech® Atech Technology Co., Ltd. TEL: 02-2794-6667 FAX: 02-2794-8004		TITLE INVERTER	
								DWG. NO. ATC-05-011	
	RELEASE	02/15/2005	BART	PKAER	SUEDY	UNITS: M/M	SAFETY		SHEET 10F 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	DRAW		<i>Pair</i>
REVISIONS						02/15/05			