
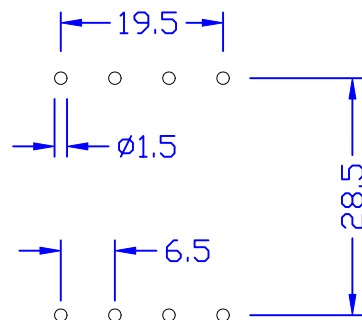
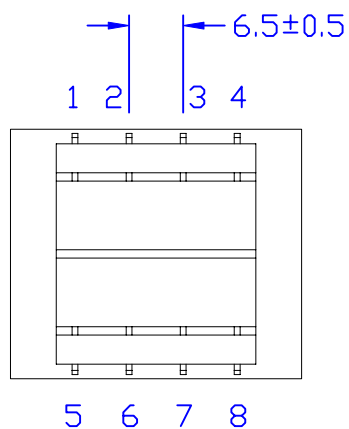
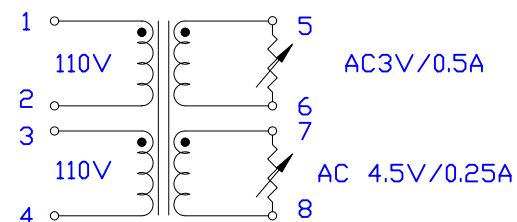
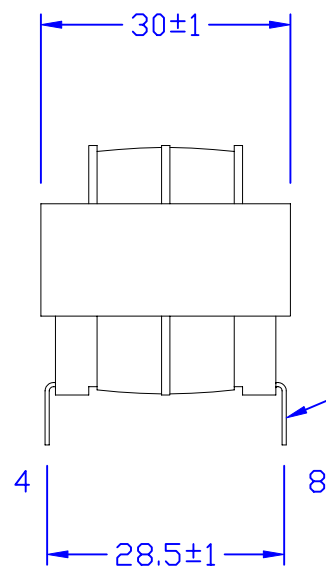


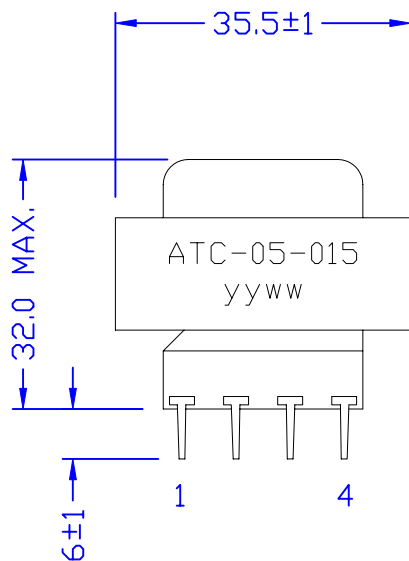

SUGGESTED PAD LAYOUT

ELECTRICAL CHARACTERISTICS :

1. PRIMARY RATED VOLTAGE AND FREQUENCY : 110 V 60 Hz
2. EXCITING CURRENT : INPUT PRIMARY 110 V 60 Hz 30 mA MAX.
3. SECONDARY RATED VOLTAGE :

INPUT VOLTAGE	COLOR/PIN NO.	RATED VOLTAGE	RATED CURRENT
110V/60Hz	7-8	4.5VAC±5%	0.25A
(1+3)-(2+4)	5-6	3VAC±5%	0.5A

4. HI-POT TEST : SHALL WITHSTAND WITHOUT BREAKDOWN, INPUT 50 Hz LEAKAGE CURRENT 5 mA/1MIN.
1.5 KV FOR ONE MINUTE BETWEEN PRIMARY TO SECONDARY.
1.0 KV FOR ONE MINUTE BETWEEN PRIMARY TO CORE.
1.0 KV FOR ONE MINUTE BETWEEN SECONDARY TO CORE.
5. INSULATION TEST : 500 VDC 100 M OHM MIN. BETWEEN WINDINGS AND WINDINGS AND CORE.

						Atech® Atech Technology Co., Ltd. TEL:02-2794-6667 FAX:02-2794-8004	TITLE POWER TRANSFORMER	
							DWG. NO.	ATC-05-015
	RELEASE	03/24/2005	BART	ANDY	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW
REVISIONS						03/24/05		<i>Pair</i>