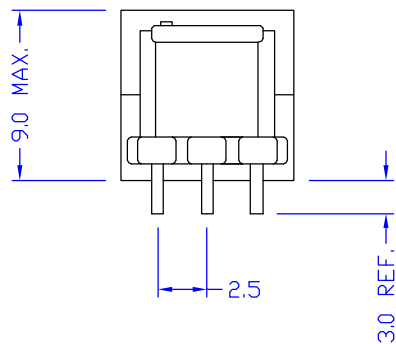

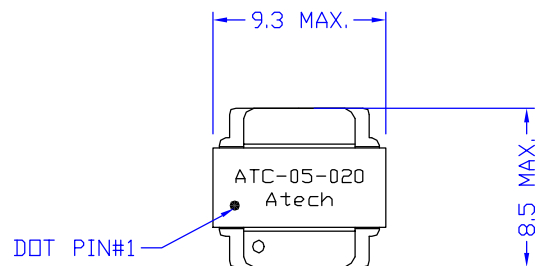


#### ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 : 23 OHM MAX.  
PIN 5-6 = 17 mOHM MAX.
- INDUCTANCE (@50KHz, 1Vrms) :  
PIN 1-3 = 1.9 mH REF.  
PIN 5-6 = 3 uH  $\pm 15\%$ .
- HI-POT (600VAC, 3mA, 2S) :  
PRI-SEC, PRI-CORE, SEC-CORE

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE  $\pm 0.25$

|           |             |            |      |       |       |                                                                                               |                        |                     |
|-----------|-------------|------------|------|-------|-------|-----------------------------------------------------------------------------------------------|------------------------|---------------------|
|           |             |            |      |       |       | <b>Atech<sup>®</sup></b><br>Atech Technology Co., Ltd.<br>TEL: 02-2794-6667 FAX: 02-2794-8004 | TITLE<br>EE8.3 X'FMR   |                     |
|           |             |            |      |       |       |                                                                                               | DWG. NO.<br>ATC-05-020 |                     |
|           | RELEASE     | 05/17/2005 | BART | FRANK | SUEBY | UNITS:<br>M/M                                                                                 | SAFETY                 | SHEET 1 OF 1        |
| NO.       | DESCRIPTION | DATE       | BY   | CHK   | APPD  | DATE                                                                                          |                        |                     |
| REVISIONS |             |            |      |       |       | 05/17/05                                                                                      |                        | DRAW<br><i>Pair</i> |