
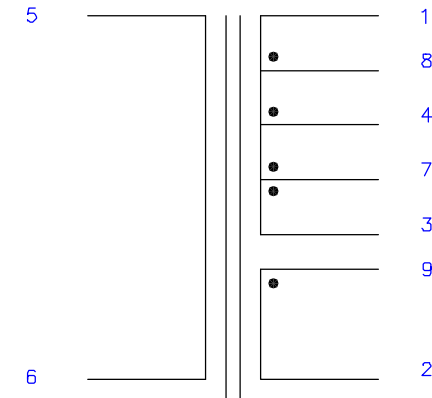
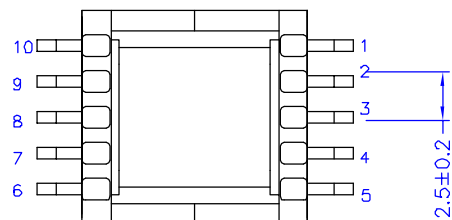

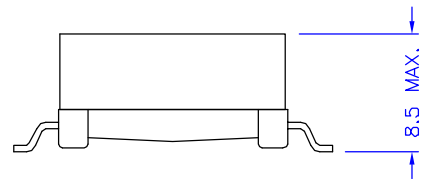


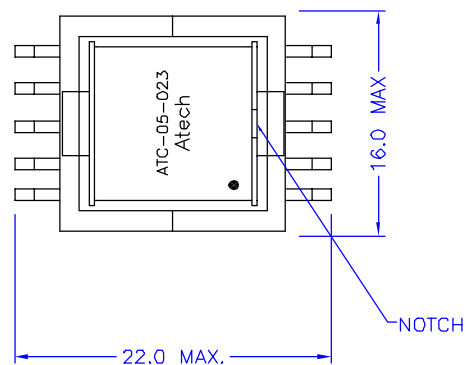

ELECTRICAL CHARACTERISTICS:

- DCR : PIN 5-6 = $0.13 \pm 15\%$.
PIN 2-9 = $0.63 \pm 15\%$.
PIN 3-7 = $1.43 \pm 15\%$.
- INDUCTANCE (@100KHz, 0.1 Vrms) :
PIN 5-6 = $120 \mu\text{H} \pm 5\%$.
PIN 2-9 = $30 \mu\text{H} \pm 5\%$.
PIN 7-3 = $168 \mu\text{H} \pm 5\%$.
PIN 1-7 = $14 \mu\text{H} \pm 5\%$.
- LEAKAGE INDUCTANCE (@100KHz, 0.1 Vrms) :
PIN 5-6 (7-9, 1-2-3 SHORT) = $3.5 \mu\text{H} \text{ MAX.}$
- TURN RATIO (@400KHz, 0.1Vrms) :
PIN 5-6:7-3 = $0.847 \pm 1\%$.
PIN 5-6:7-4 = $6.33 \pm 1\%$.
PIN 5-6:4-8 = $18.87 \pm 1\%$.
PIN 5-6:9-2 = $2 \pm 1\%$.
PIN 5-6:8-1 = $7.58 \pm 1\%$.
- HI-POT : @500VAC, 0.1mA, 2SEC

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004		TITLE	TRANSFORMER
								DWG. NO.	ATC-05-023
	RELEASE	05/13/200	BART	EEFLYS	SUEDY	UNITS:	SAFETY	SHEET 1 OF 1	DRAW <i>Pair</i>
NO:	DESCRIPTION	DATE	BY	CHK	APPD	M/M			
REVISIONS						DATE			