
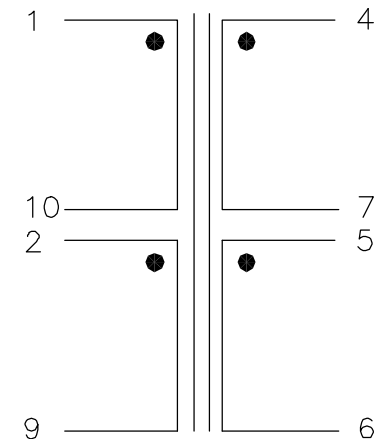
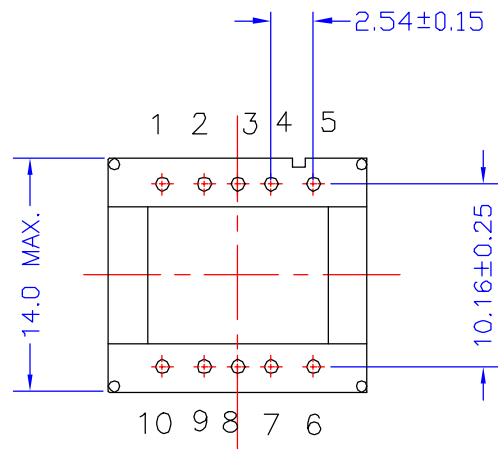


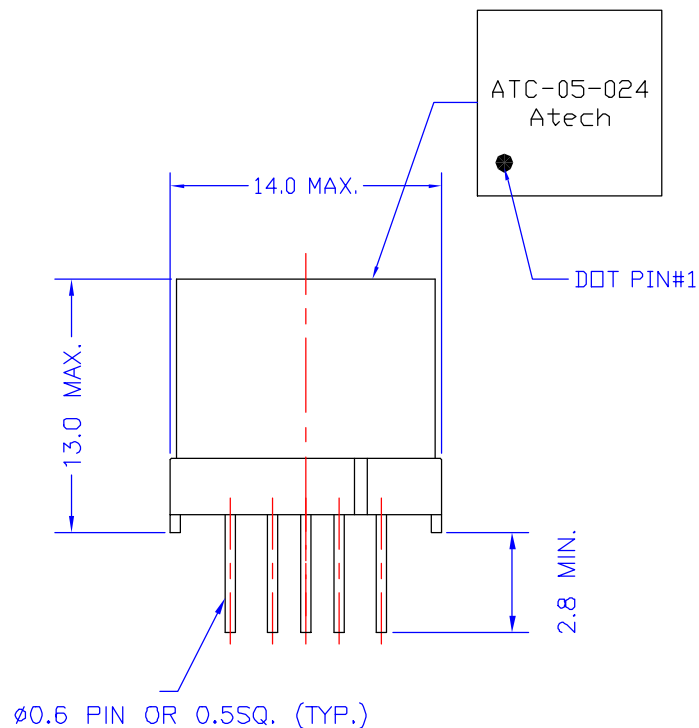

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-10 = 22.4 OHM MAX.
PIN 2-9 = 31.4 OHM MAX.
PIN 5-6 = 11.2 OHM MAX.
PIN 4-7 = 11.2 OHM MAX.
- INDUCTANCE (@10KHZ, 0.1Vrms, 5-7 SHORT) :
PIN 4-6 = 20 mH ±5%.
PIN 4-6 (W/H 100 mADC) = 17 mH MIN.
- LEAKAGE INDUCTANCE (@100KHz, 0.1Vrms, 5-7, 2-10, 1-9 SHORT) :
PIN 4-6 = 165 uH MAX.
- INTERWINDING CAP. (@10KHz, 0.1Vrms, 2-10, 5-7 SHORT) :
PIN 1-4 = 180 pF MAX.
- TURN RATIO (@1KHz, 0.1Vrms, 2-10, 5-7 SHORT) :
PIN 1-9:4-6 = 2 ±2%.
- HI-POT (@1500VAC, 1mA, 2S) :
PRI-SEC

						Atech®		TITLE TRANSFORMER	
						Atech Technology Co. Ltd. TEL:022794-6667 FAX:022794-8004		DWG. NO. ATC-05-024	
A	SPEC. & DIM.	06/09/2005	BART	MICHAEL	SUEDY	UNITS: M/M		SAFETY	
	RELEASE	06/07/2005	BART	MICHAEL	SUEDY	DATE 06/07/05		SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD			DRAW <i>Pair</i>	
REVISIONS									