
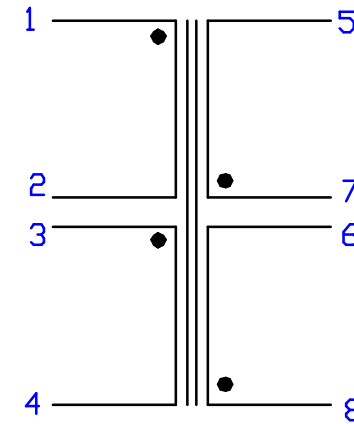




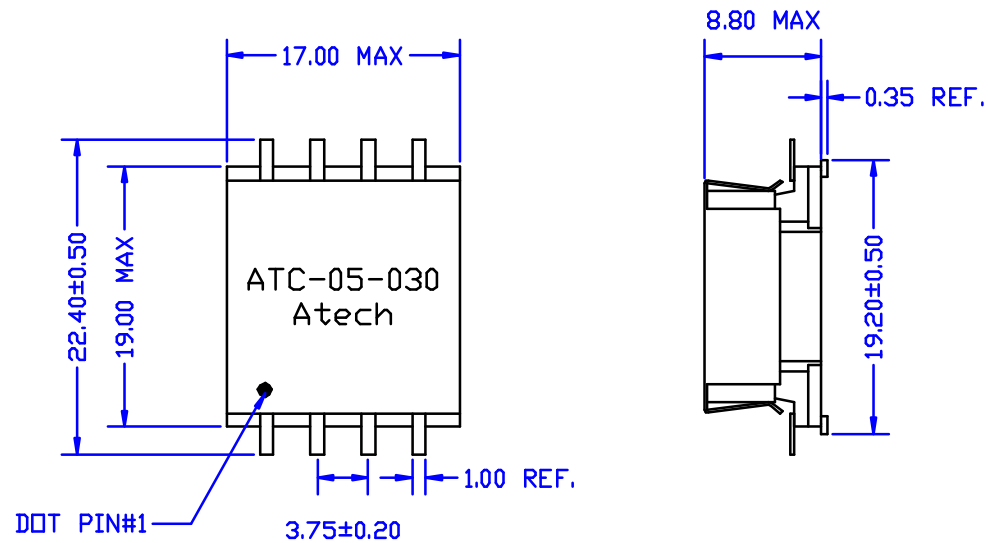

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-2 = 270 mΩ MAX.
PIN 3-4 = 140 mΩ MAX.
PIN 6-8 = 20 mΩ MAX.
PIN 5-7 = 20 mΩ MAX.
- INDUCTANCE (@300KHz, 1V) :
PIN 1-2 = 56 μH ±10%.
- LEAKAGE INDUCTANCE
(@300KHz, 0.1V, PIN 5-6-7-8, 2-3 SHRT) :
PIN 1-4 = 8.8 μH MAX.
- TURN RATIO (@8KHz, 0.1V) :
PIN 1-2:8-6 = 6 ±4%.
PIN 1-2:3-4 = 2 ±4%.
PIN 1-2:7-5 = 6 ±4%.
- HI-POT (PIN 2-3, 6-7 SHRT) :
PIN 2-6, 500V, 1mA

						Atech® Atech Technology Co. Ltd. TEL:022734-6667 FAX:022734-8804	TITLE TRANSFORMER
							DWG. NO. ATC-05-030
RELEASE	06/21/2005	BART	ANDY	SUEDY	UNITS: M/M		SAFETY
NO.	DESCRIPTION	DATE	BY	CHK	APPD		
REVISIONS						06/21/05	SHEET 1 OF 1
							DRAW <i>Pair</i>