
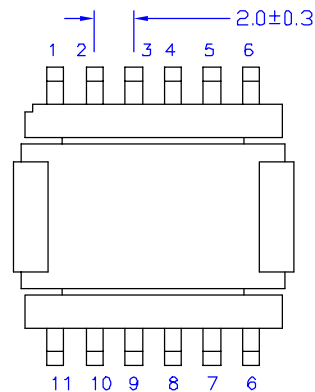

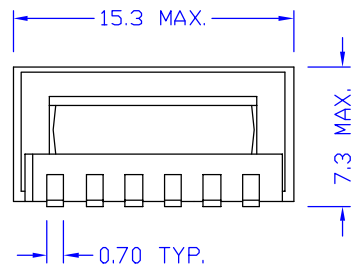
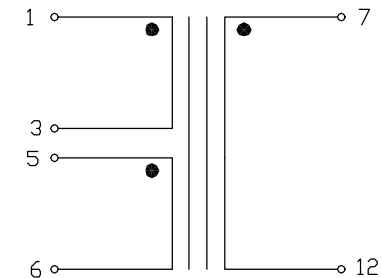



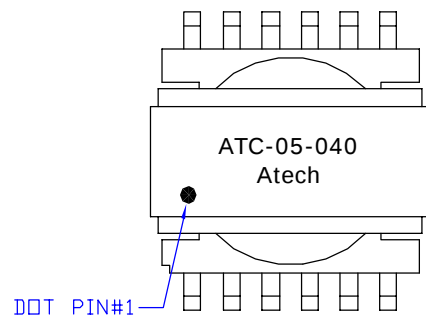

ELECTRICAL CHARACTERISTIC :

- DCR : PIN 1-3 = 340 mΩ MAX.
PIN 5-6 = 1.9 Ω MAX.
PIN 7-12 = 70 mΩ MAX.
- INDUCTANCE :
(@100KHz, 0.1Vrms)
PIN 1-3 = 203 μH ±9%.
(W/H 700mA)
PIN 1-3 = 170 μH MIN.
- LEAKAGE INDUCTANCE (@100KHz, 0.1Vrms) :
PIN 1-3(7-12, 6-5 SHORT) = 13 μH MAX.
- TURN RATIO (@800KHz, 0.1Vrms) :
PIN 7-12:1-3 = 0.33 ±3%.
PIN 5-6:1-3 = 0.4 ±3%.
- HI-POT :
(@1600VAC, 1mA, 2S) : PRI-SEC
(@500VAC, 1mA, 2S) : WINDING-CORE

						Atech® Atech Technology Co., Ltd. TEL:02-2794-6667 FAX:02-2794-8004	TITLE TRANSFORMER	
							DWG. NO. ATC-05-040	
	RELEASE	09/09/2005	BART	MICHAEL	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		
REVISIONS						09/09/05		DRAW <i>Pair</i>