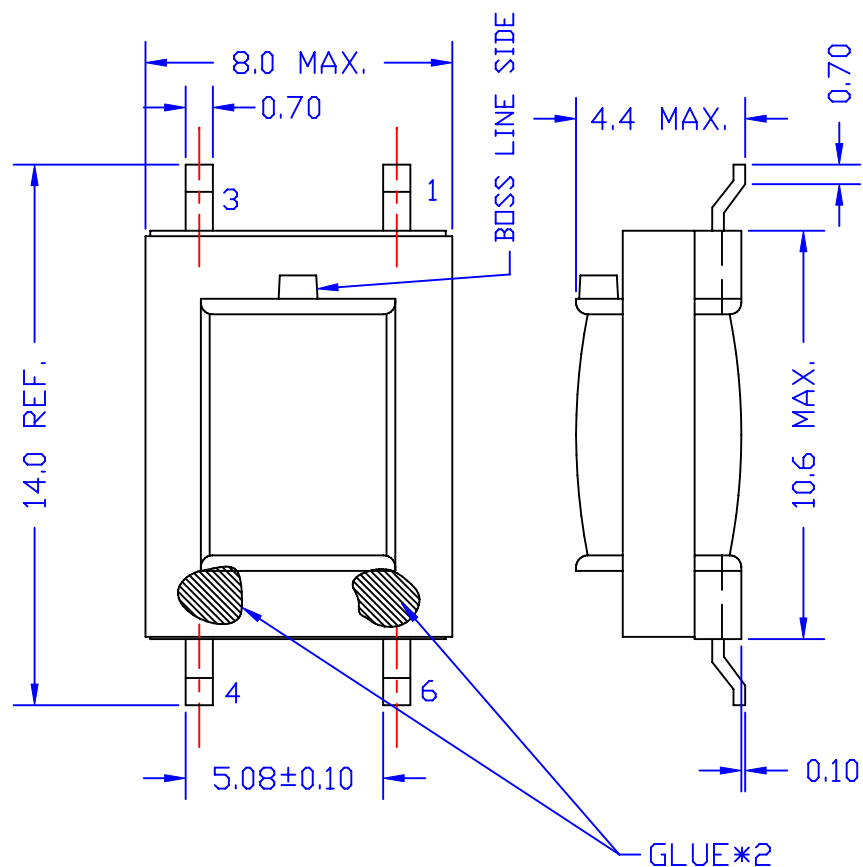


ELECTRICAL CHARACTERISTICS:

1. D.C.R. PIN 1-3 = 105 Ω HM $\pm$ 10% PIN 4-6 = 105 Ω HM $\pm$ 10%.
2. INDUCTANCE (@ 250HZ, 0.5Vrms, PARALLEL) 1-3 = 3 H MIN.
3. IMPEDANCE (@ 1KHZ, 0dBm, 6-4 W/H 400 Ω HM)
1-3 = 600 Ω HM $\pm$ 3%.
4. INSERTION LOSS = 2.3 dB MAX.
(@ 1KHZ, 0dBm, W/H 400 Ω HM LOAD)
5. FREQ. RESP. (@ 300HZ TO 4KHZ, REF. 1KHZ) = $\pm$ 0.12dB
6. RETURN LOSS: @300HZ = 28dB MIN. @1KHZ = 35dB MIN.
@4KHZ = 35dB MIN.
- 7 TURN RATIO : 1-3:6-4 = 1 $\pm$ 1%.
8. HI-POT = 1250 VAC, 1mA, 2SEC. (PRI.-SEC.)

					Atech®		TITLE 600: 400 TRANSFORMER
					Atech Technology Co., Ltd.		DWG. NO. ATC-05-042AR
					TEL:(02)2794-6667 FAX:(02)2794-8004		
RELEASE	01/11/2008	Pair	Vincent	Eugene	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO. DESCRIPTION	DATE	BY	CHK	APPD	DATE	CTP30803LA	DRAW Pair
REVISIONS					01/11/2008		