

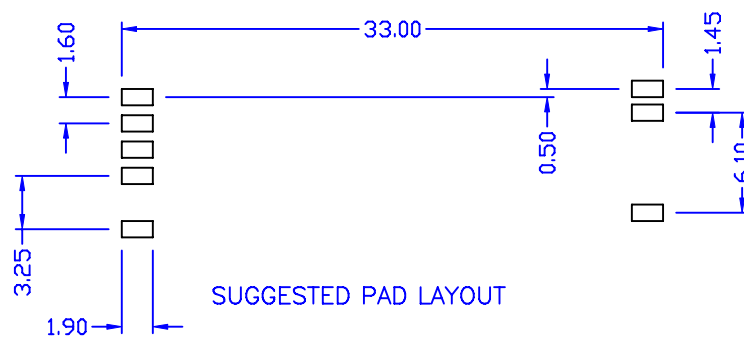
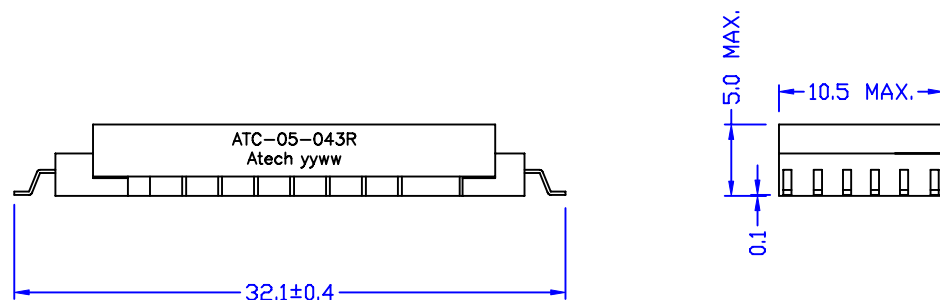


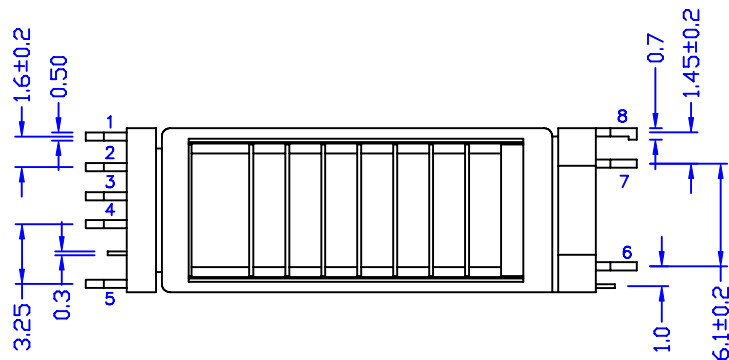

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE REFERENCE

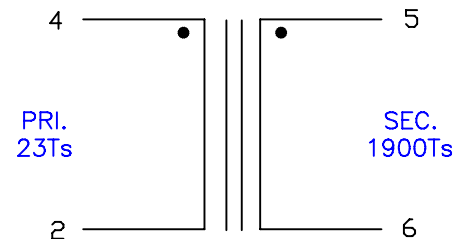

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 5-6 = 954.5 OHM MAX.
PIN 4-2 = 149.5 mOHM MAX.
- INDUCTANCE (@10KHZ, 1Vrms) :
PIN 5-6 = 1.0 H MIN.
PIN 4-2 = 190 uH ±25%.
- LEAKAGE INDUCTANCE (@50KHz, 1Vrms) :
PIN 5-6 (4-2 SHORT) = 320 mH MAX.
PIN 4-2 (5-6 SHORT) = 34 uH MAX.
- HI-POT:
(@500VAC, 0.5mA, 1MIN) : PRI-SEC, PRI-CORE
(@1600VAC, 0.5mA, 2S) : SEC-CORE
- RoHS COMPLIANCE

C	CHANGE MARKING	11/23/2008	PAIR	WELL	EUGENE	Atech® Atech Technology Co. Ltd. TEL:0212794-6667 FAX:0212794-8004	TITLE	UI-9.8 INVERTER
B	LEAKAGE	04/19/2006	PAIR	WELL	EUGENE		DWG. NO.	ATC-05-043R
A	DIM&PAD	11/09/2005	BART	VNCE	SUEDY			
	RELEASE	10/26/2005	BART	MICHAEL	SUEDY	UNITS:		
NO	DESCRIPTION	DATE	BY	CHK	APPD	M/M	SAFETY	SHEET 1 OF 1
REVISIONS						DATE	P/N:	DRAW
						10/26/05	CTWA09800A	Pair