

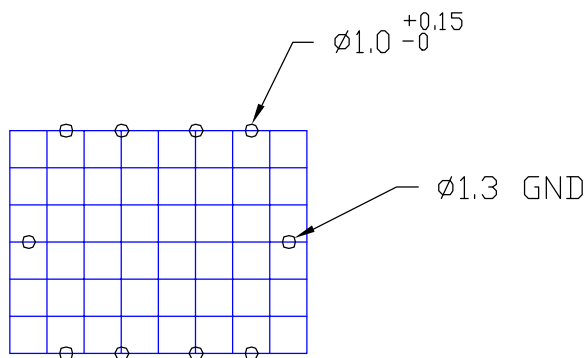
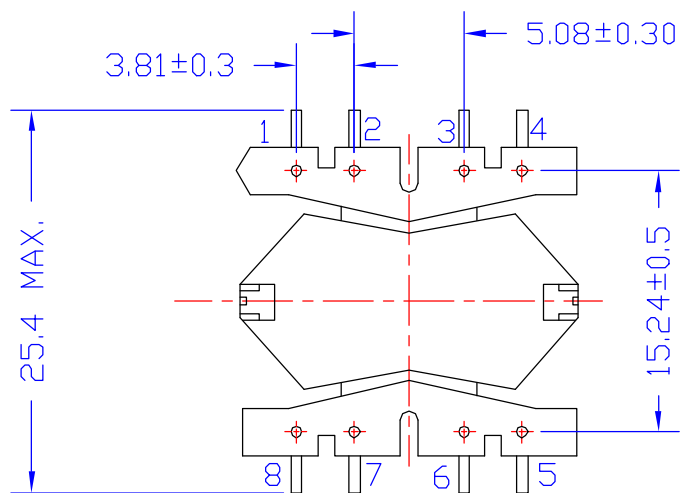


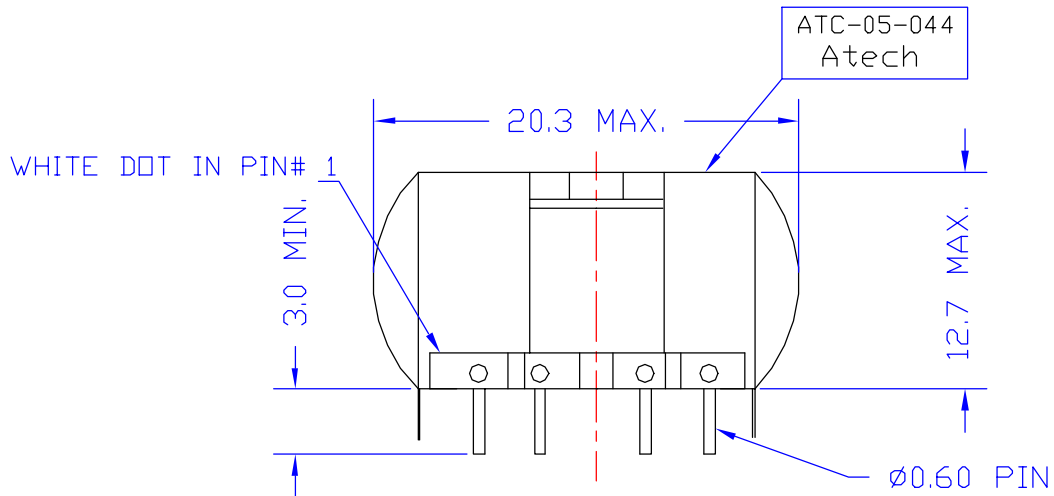

GRID 2.54*2.54

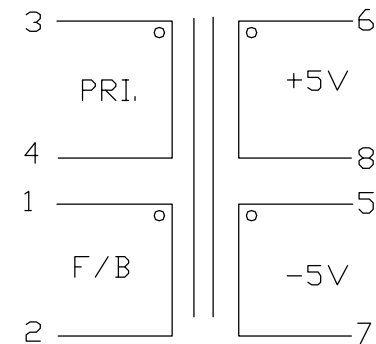

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-2 = 3 Ω MAX.
PIN 3-4 = 5 Ω MAX.
PIN 5-7 = 0.16 Ω MAX.
PIN 6-8 = 0.066 Ω MAX.
- INDUCTANCE (@10KHz, 0.5Vrms) :
PIN 3-4 = 3.75 mH ±5%.
- LEAKAGE INDUCTANCE (@100KHz, 0.5Vrms W/H PIN 1-2 SHRT) :
PIN 3-4 = 80 μH MAX.
- TURN RATIO :
PIN 3-4:1-2 = 2.2 ±1%.
PIN 3-4:5-7 = 4.53 ±1%.
PIN 3-4:6-8 = 6.42 ±1%.
- HI-POT (@1500Vrms, 1mA, 2S)
PIN 1-5, 1-6, 1-CORE
PIN 3-5, 3-6, 3-CORE

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-8887 FAX:(02)2794-8004		TITLE	
								TRANSFORMER	
								DWG. NO.	
								ATC-05-044	
	RELEASE	09/12/2005	BART	VICENT	SUEDY	UNITS:		SAFETY	
						M/M			
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE			
REVISIONS						09/12/05		DRAW	
								Pair	