
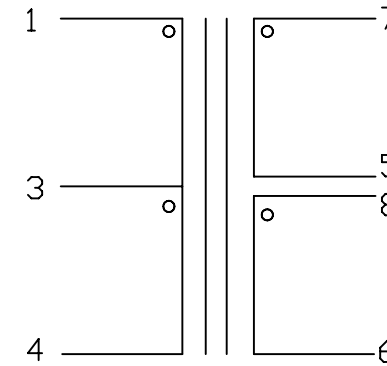
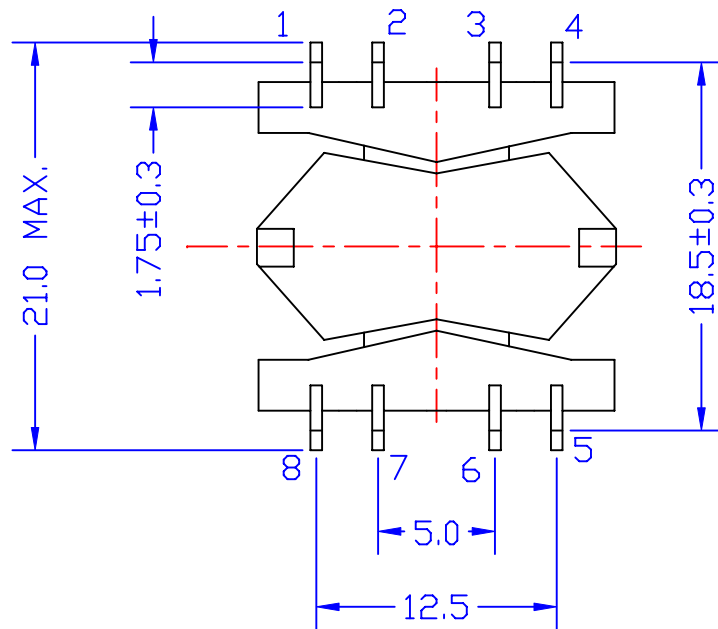


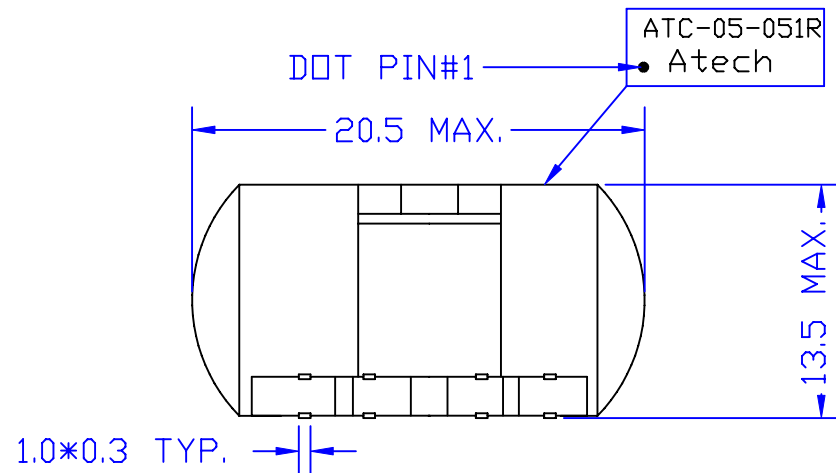

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-4 = 75 mΩHM MAX.
PIN 5-7 = 63 mΩHM MAX.
PIN 6-8 = 63 mΩHM MAX.
- INDUCTANCE (@0.1V, 10KHz) :
PIN 1-4 = 250 μH ±25%.
PIN 5-7 = 203 μH ±25%.
PIN 6-8 = 203 μH ±25%.
- LEAKAGE INDUCTANCE (@0.1V, 100KHz) :
PIN 1-4 (5-6-7-8 SHORT) = 345 nH MAX.
- INTERWINDING CAP (@0.1V, 100KHz) :
PIN 1-5 = 33 pF MAX.
PIN 4-6 = 33 pF MAX.
PIN 6-7 = 70 pF MAX.
- TURN RATIO (@0.1V, 400KHz) :
PIN 8-5 (7-6 SHORT) : 1-4 = 1.8 ±4%.
- HI-POT (@500VAC, 1mA, 2SEC) :
PRI-SEC
- RATED VOLTAGE 2Vpeak-peak
- RATED CURRENT 0.8Aac
- RoHS COMPLIANCE.

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ±0.25

Operation Temperature : 0°~+70°C

Storage Temperature : -40°~+85°C

C	RATED VOLTAGE	05/31/2007	PAIR	SEN	EUGENE	Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE	TRANSFORMER
B	ADD TRMPERATURE	05/03/2007	PAIR	SEN	EUGENE		DWG. NO.	ATC-05-051R
A	MARKING ADD R	02/15/2007	PAIR	SEN	EUGENE			
	RELEASE	10/17/2005	BART	LYS	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW
REVISIONS						10/17/05	CTWB11000A	Pair