
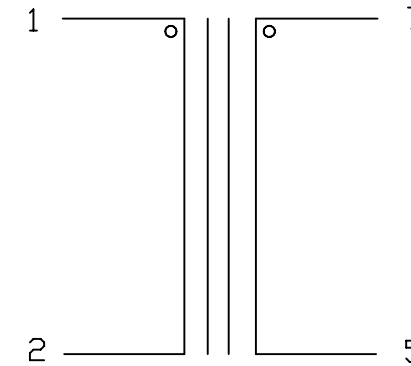
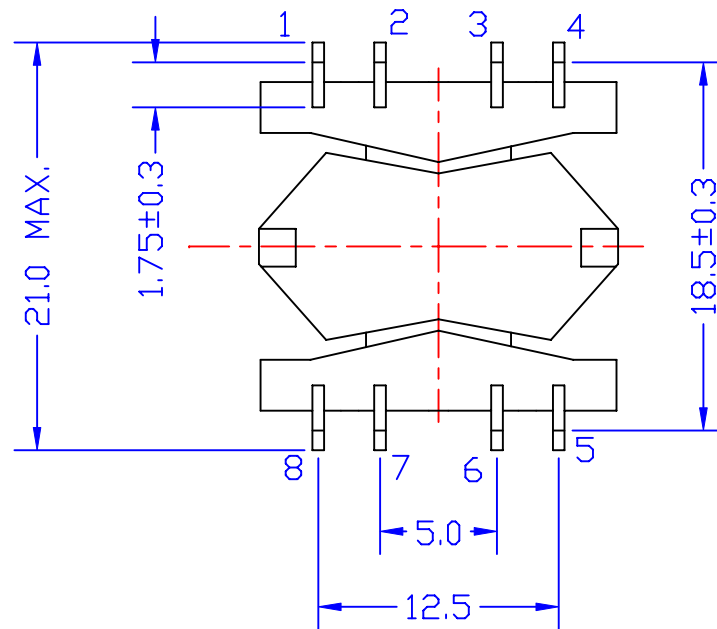


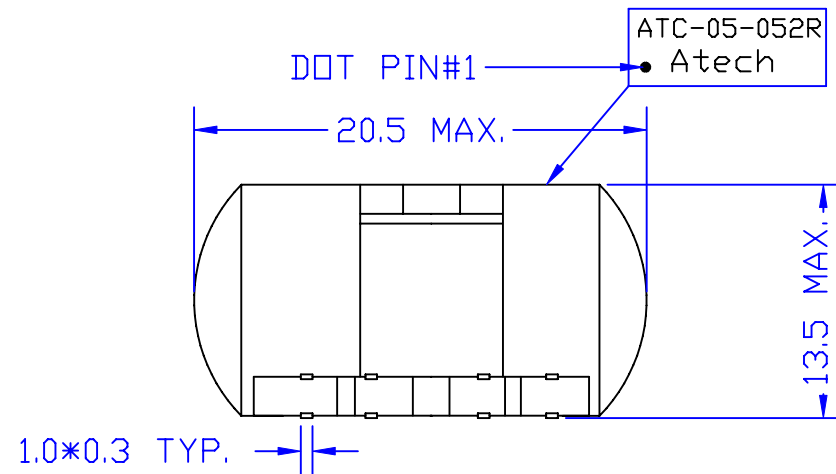

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-2 = 78 mΩHM MAX.
PIN 5-7 = 90 mΩHM MAX.
- INDUCTANCE (@0.1Vrms, 10KHz) :
PIN 1-2 = 80 μH ±5%.
PIN 5-7 = 160 μH ±5%.
- LEAKAGE INDUCTANCE (@0.1Vrms, 100KHz) :
PIN 1-2 (5-7 SHORT) = 1.2 μH MAX.
PIN 5-7 (1-2 SHORT) = 2.4 μH MAX.
- INTERWINDING CAP (@0.1Vrms, 100KHz) :
PIN 1-7 = 45 pF MAX.
- TURN RATIO (@0.1Vrms, 400KHz) :
PIN 7-5:1-2 = 1.4 ±3%.
- HI-POT (@500VAC, 1mA, 2SEC) :
PRI-SEC
- RATED VOLTAGE 2Vpeak - peak
- RATED CURRENT 1.2Aac
- RoHS COMPLIANCE.

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ±0.25

Operation Temperature : 0°~+70°C

Storage Temperature : -40°~+85°C

C	RATED VOLTAGE	05/31/2007	PAIR	SEN	EUGENE	Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE	TRANSFORMER
B	ADD TRMPEATURE	05/03/2007	PAIR	SEN	EUGENE		DWG. NO.	ATC-05-052R
A	MARKING ADD R	02/15/2007	PAIR	SEN	EUGENE			
	RELEASE	10/19/2005	BART	LYS	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW
REVISIONS						10/19/05	CTW806000A	Pair