
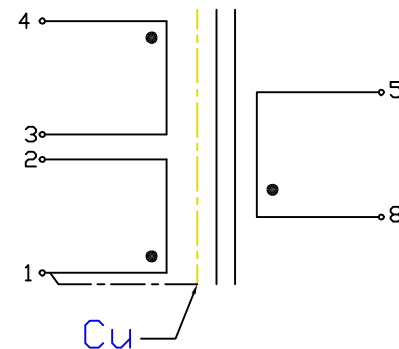

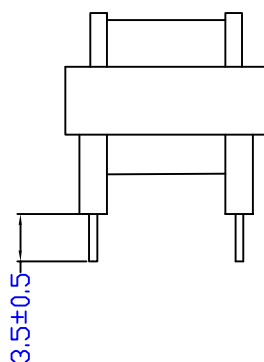





ELECTRICAL CHARACTERISTICS :

- DCR : PIN 4-3 = 4.9 Ω HM Max
PIN 1-2 = 1.6 Ω HM Max
PIN 8-5 = 102 m Ω HM Max
- INDUCTANCE (@1KHZ, 0.25Vrms) :
PIN 4-3 = 4.3mH $\pm 15\%$
- TURN RATIO : (@60KHZ, 1Vrms)
PIN 4-3 : PIN1-2 = 4.414 $\pm 2\%$
PIN 4-3:PIN8-5 = 12.93 $\pm 2\%$
- HI-POT (@ 3KVAC 3mA, 15SEC) :
PRI-SEC; COIL-CORE
- INSULATION (@500VDC, 100MOHM MIN)
PRI-SEC; PRI-CORE

						Atech®		TITLE TRANSFORMER	
						Atech Technology Co., Ltd. TEL022794-6667 FAX022794-8804		DWG. NO. ATC-05-060	
	RELEASE	10/10 /2005	Lanco			UNITS: M/M		SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 2005/10/10		SHEET 1 OF 1	
REVISIONS								DRAW Lanco	