
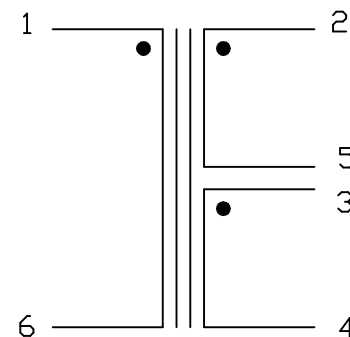
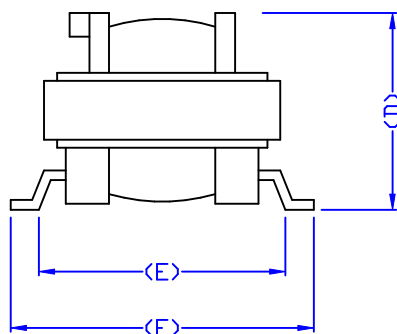
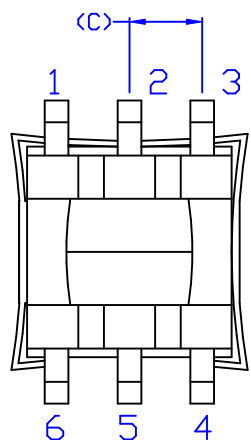



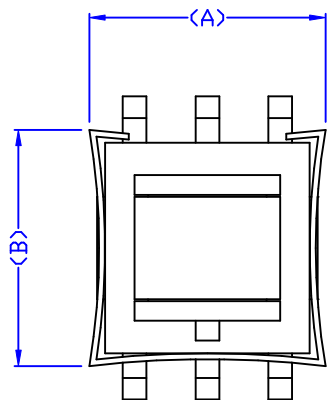

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-6 = 2 OHM MAX.
PIN 2-5 = 2 OHM MAX.
PIN 3-4 = 2 OHM MAX.
- INDUCTANCE (@100KHz, 0.1Vrms) :
PIN 1-6 = 330 uH $\pm 25\%$.
- LEAKAGE INDUCTANCE (@100KHz, 0.1Vrms) :
PIN 1-6 (2-5, 3-4 SHROT) = 400 nH MAX.
- TURN RATIO (@100KHz, 0.1Vrms) :
PIN 1-6:2-5 = 1 $\pm 2\%$.
PIN 1-6:3-4 = 1 $\pm 2\%$.
- HI-POT (@1500VDC, 1mA, 6 SEC) :
- RoHS COMPLIANCE.

A	B	C	D	E	F	G
6.00	6.00	1.85	5.00	6.60	7.70	0.60
± 0.5	± 0.5	± 0.2	± 0.5	± 0.3	± 0.3	± 0.2

						Atech® Atech Technology Co., Ltd. TEL: 0212794-6667 FAX: 0212794-8004		TITLE CURRENT TRANSFORMER	
								DWG. NO. ATC-05-071R	
	RELEASE	11/18/2005	BART	LYS	SUEDY	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE			DRAW
REVISIONS						11/18/05			Pair