
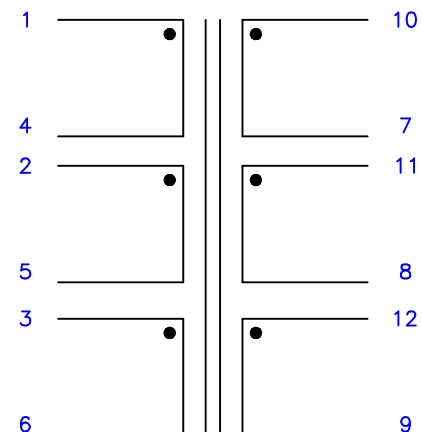
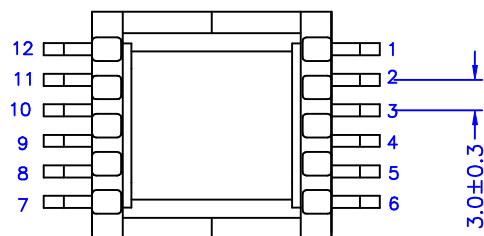

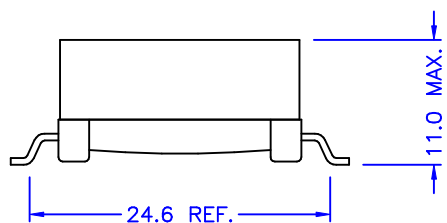


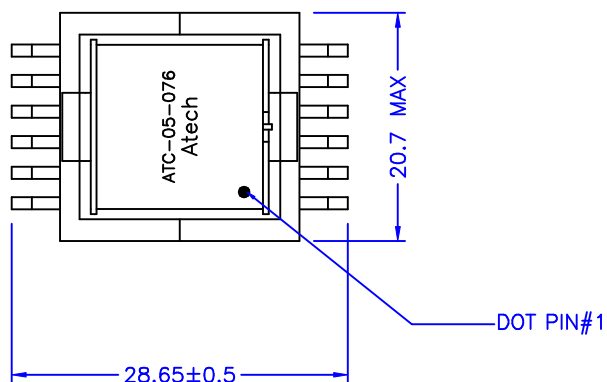

ELECTRICAL CHARACTERISTICS:

- DCR : PIN 1-4 = 2-5 = 290 mOHM MAX.
PIN 7-10 = 8-11 = 9-12 = 145 mOHM MAX.
PIN 3-6 = 370 mOHM MAX.
- INDUCTANCE (@10KHz, 0.1Vrms) :
PIN 1-4 = 2-5 = 3-6 = 176 uH ±10%.
PIN 7-10 = 8-11 = 9-12 = 83.7 uH ±10%.
- LEAKAGE INDUCTANCE (@100KHz, 0.1Vrms) :
PIN 1-4 (2-3-5-6, 7-8-9-10-11-12 SHORT) :
= 3.5 uH MAX.
- TURN RATIO (@10KHz, 0.1Vrms) :
PIN 1-4:10-7 = 1.45 ±2%.
PIN 2-5:11-8 = 1.45 ±2%.
PIN 3-6:12-9 = 1.45 ±2%.
- HI-POT (@1500VDC, 1mA, 1MIN) :
PRI-SEC

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004		TITLE FLYBACK TRANSFORMER(12V,1.5Amp)	
								DWG. NO. ATC-05-076	
	RELEASE	12/09/2005	BART	MICHAEL	SUEDY	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE			DRAW Pair
REVISIONS						12/09/05			