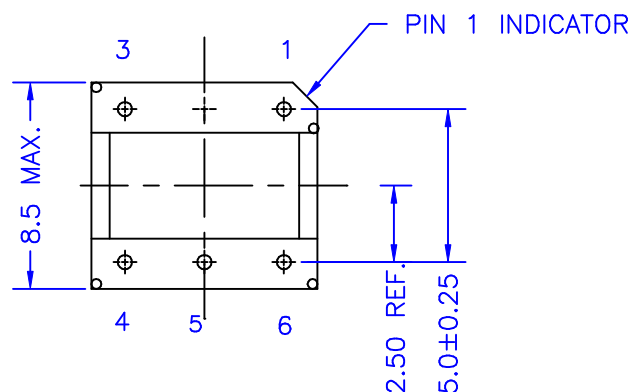
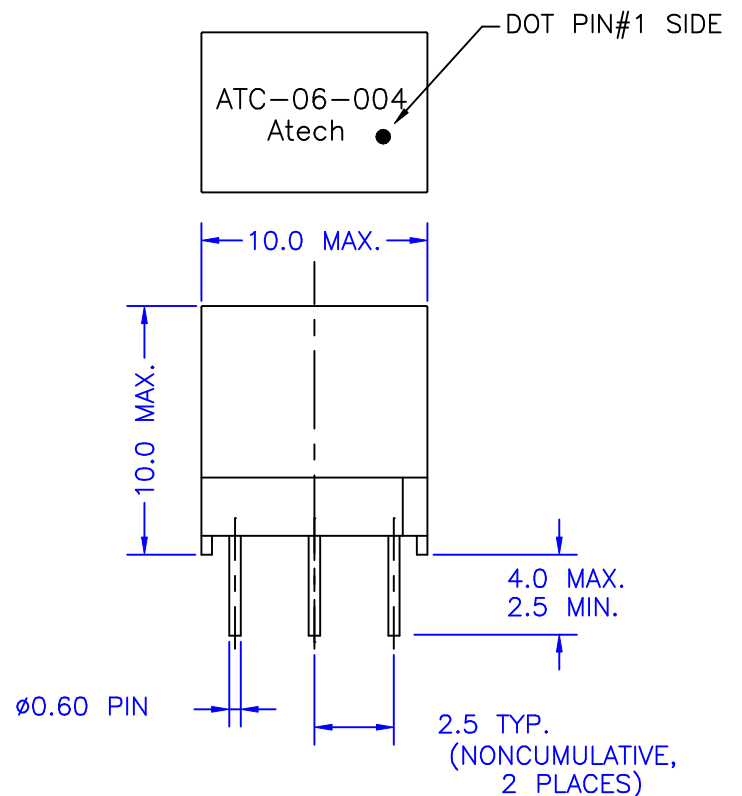


ELECTRICAL CHARACTERISTICS

1. D.C.R. : PIN 1-3 = 355 mOHM MAX.
PIN 4-5 = 496 mOHM MAX.
PIN 5-6 = 560 mOHM MAX.
2. INDUCTANCE (@1KHZ. 0.1Vrms)
PIN 1-3 = 1.5 mH MIN.
3. INSERTION LOSS : (@ 0dBm, W/H 1-3 = 50 OHM , W/H 4-5 = 100 OHM)
1.5 MHz = 0.5 dB MAX.
(@ 0dB, W/H 1-3 = 50 OHM, W/H 5-6 = 120 OHM)
2MHz = 0.5 dB MAX.
4. FREQ. RESP (REF. 1.5MHz)
20KHz = +/-0.25dB
3MHz = +/-0.25dB
(REF. 2MHz)
20KHz = +/-0.25dB
3MHz = +/-0.25dB
5. RETURN LOSS(@ -10dB, W/H 4-5 = 100 OHM)
1.5MHz = 20dB MIN.
(@ -10dBm, W/H 5-6 = 120 OHM)
2MHz = 20dB MIN.
6. TURNS RATIO (@10KHZ. 0.1Vrms)
PIN 5-4 : PIN 1-3 = 1.35+/-1%
PIN 6-5 : PIN 1-3 = 1.5+/-1%
7. HI-POT (@ 500 VAC, 1mA, 2SEC) PRI. - SEC.

						Atech[®] Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004		TITLE TRANSFORMER	
								DWG. NO. ATC-06-004	
	RELEASE	02/27/2006	PAIR	AL	SUEDY	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW	
REVISIONS						02/27/06	CTE407001A	Pair	