
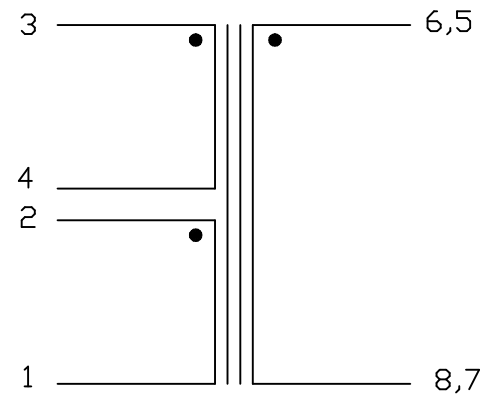


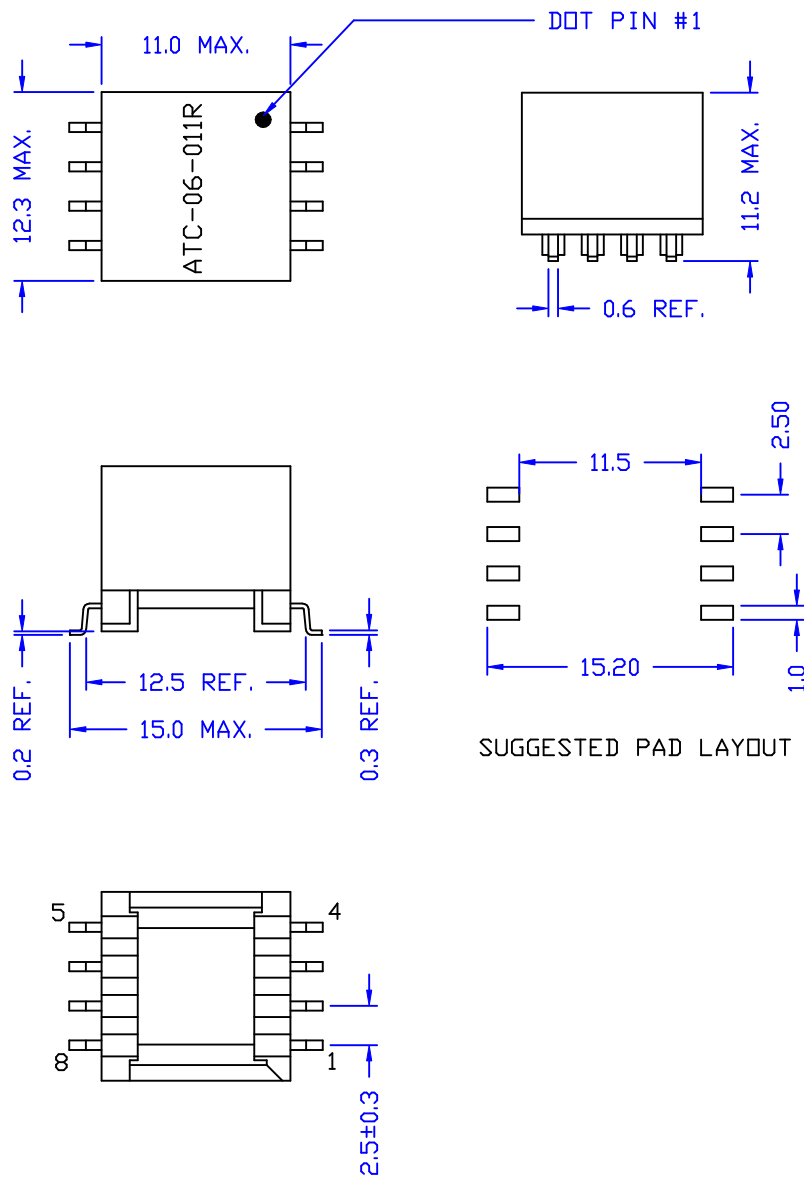

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 2-1 = $0.56 \pm 10\%$
PIN 3-4 = $1.23 \pm 10\%$
PIN 5-7 = 6-8 = $0.034 \pm 30\%$
- INDUCTANCE (@300KHZ, 0.1Vrms) :
PIN3-4 = $1.9\text{mH} \pm 20\%$
- VOLTAGE RATIO : APPLY 100Vrms,1KHZ TO PINS 3-4
PIN 6-8 = PIN 5-7 = $0.825 \pm 3\%$
PIN 2-1 = $0.392 \pm 3\%$
- LONGITUDINAL BAL. :
@50KHZ~1.544MHZ = 40 dB MIN.
- HI-PDT (@1500VDC, 1mA, 1SEC) : PIN (1,4) - (5,6)
- RoHS COMPLIANCE

						Atech® Atech Technology Co., Ltd. TEL:0212794-6667 FAX:0212794-8004	TITLE POWER TRANSFORMER	
							DWG. NO. ATC-06-011R	
	RELEASE	03/16/2006	PAIR	MICHAEL	EUGENE	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>
REVISIONS						03/16/06		