


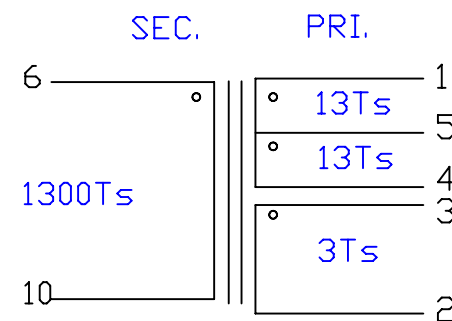

1. D.C.R : PIN 6-10 = 297 Ω M MAX.
1-5 = 0.185 Ω M MAX.
5-4 = 0.185 Ω M MAX.
3-2 = 0.075 Ω M MAX.
2. INDUCTANCE : (@0.25V_{rms}, 70KHZ)
PIN 1-5 = 24.5 μ H $\pm$ 10%
3. LEAKAGE INDUCTANCE : (@0.25V_{rms}, 70KHZ, ALC OFF)
PIN 1-5 (2-3, 4-5, 6-10 SHORT) = 0.2 μ H $\pm$ 30%
4. TURN RATIO (@0.25V_{rms}, 500KHZ)
PIN 6-10 : 1-5 = 100 $\pm$ 3%
6-10 : 5-4 = 100 $\pm$ 3%
(@0.25V_{rms}, 250KHZ)
PIN 5-4 : 3-2 = 4.33 $\pm$ 2%
5. HI-POT (@1200VAC, 3mA, 1 Min) PRI-SEC
(@500VAC, 3mA, 1Min) PRI-CORE
(@1200VAC, 3mA, 1Min) SEC - CORE

							TITLE	TRANSFORMER
							DWG. NO.	ATC-06-013
A	TURN RATIO	06/19/2006	PAIR	MIC	EUGENE	Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004		
	RELEASE	03/23/2006	PAIR	LYS	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW
REVISIONS						03/23/06		Pair