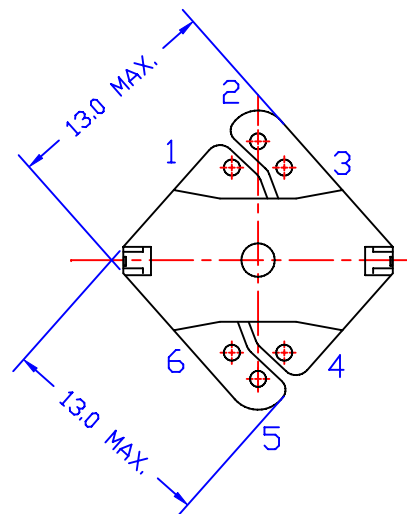
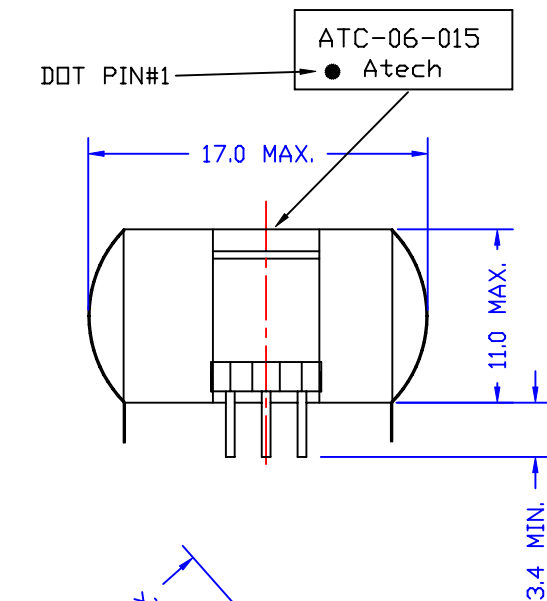


ELECTRICAL CHARACTERISTICS:

1. D.C.R : PIN 1-2 = 2-3 = 4-6 = 0.95 Ω HM MAX.
2. INDUCTANCE(@1KHZ,0.1Vrms) PIN 4-6 = 6.27mH $\pm$ 30%
3. IMPEDANCE(@10KHZ,0.1Vrms, 4-6 W/H 130 Ω HM)
PIN 1-3 = 130 Ω HM $\pm$ 10%
4. RETURN LOSS(REF. 130 Ω HM) : @256KHZ~1024KHZ = 16dB MIN.
@1024KHZ~2048KHZ = 11dB MIN.
@10MHZ = 8dB MIN.
5. TURN RATIO(@10KHZ,0.1Vrms) : PIN 3-1 : 4-6 = 1 $\pm$ 1%
6. HI-POT(@500VAC,1mA,2SEC) : PRI-SEC

B	1:1CT , RL	01/22/2007	PAIR	MICHEL	EUGENE	Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004		TITLE 130 : 130CT TRANSFORMER
		05/16/2006	PAIR	MICHEL	EUGENE			DWG. NO. ATC-06-015
	RELEASE	03/22/2006	PAIR		SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
ND	DESCRIPTION	DATE	BY	CHK	APPD	DATE 03/22/06	P/N: CTP805001A	DRAW <i>Pair</i>
REVISIONS								