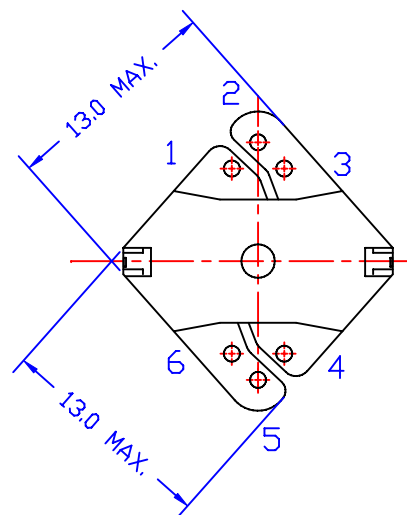
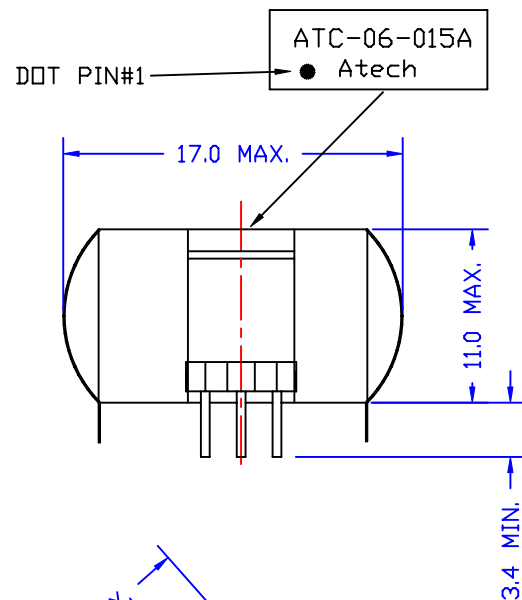


ELECTRICAL CHARACTERISTICS:

1. D.C.R : PIN 1-2 = 2-3 = 4-6 = 1.75 OHM MAX.
2. INDUCTANCE<@1KHZ,0.1Vrms> PIN 4-6 = 30mH MIN.
3. IMPEDANCE<@10KHZ,0.1Vrms, 4-6 W/H 130 ΩHM>
PIN 1-3 = 130 ΩHM +/-10%
4. RETURN LOSS<REF. 130 ΩHM> : @500HZ = 9dB MIN.
@2KHZ = 16dB MIN.
@20KHZ = 16dB MIN.
5. TURN RATIO<@10KHZ,0.1Vrms> : PIN 3-1 : 4-6 = 1+/-1% , PIN 2-1 : 3-2 = 1±1%
6. HI-POT<@500VAC,1mA,2SEC> : PRI-SEC

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004		TITLE 130 : 130CT TRANSFORMER	
								DWG. NO. ATC-06-015A	
	RELEASE	09/12/2006	PAIR		SUEDY	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW	
REVISIONS						09/12/06	CTP805000A	Pair	