

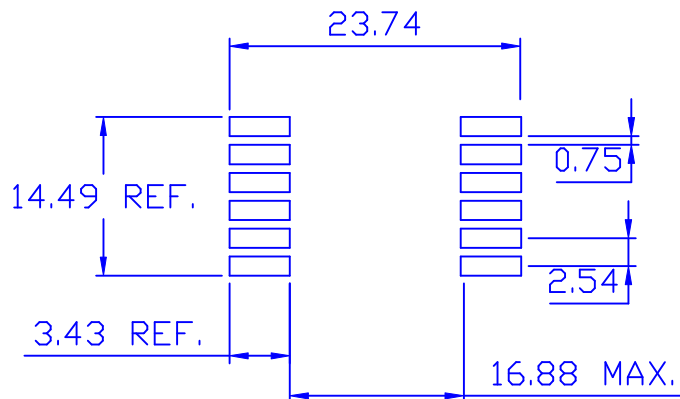
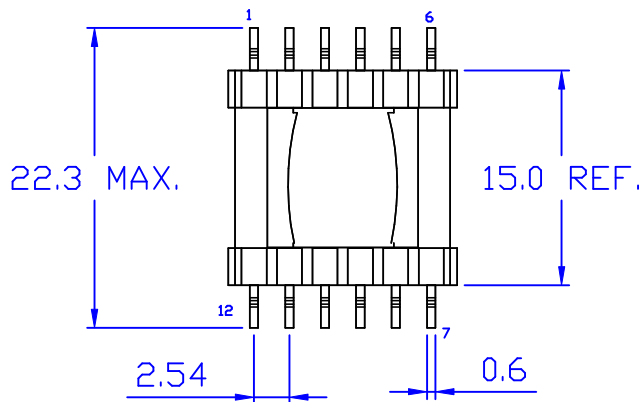
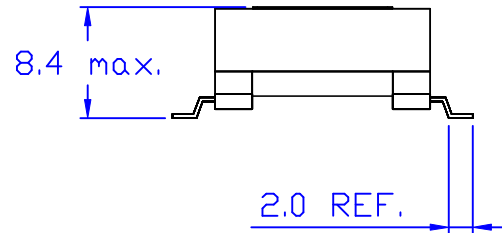



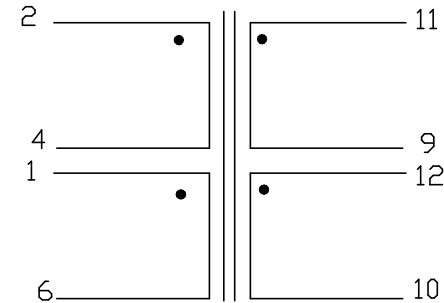

PCB LAYOUT

MARKING PIN#1 SIDE

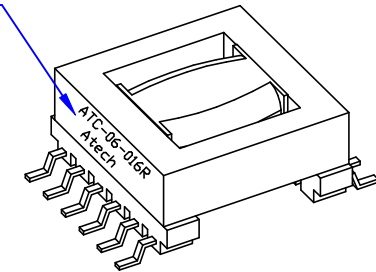

ELECTRICAL CHARACTERISTICS :

1. D.C.R. : PIN 2-4 = 200m OHM MAX. 1-6 = 450m OHM MAX.
PIN 11-9 = 32m OHM MAX. 12-10 = 22m OHM MAX.
2. INDUCTANCE(@10 KHZ, 1Vrms) : PIN 2-4 = 97uH±15%
PIN 1-6 = 8.3uH REF.
3. LEAKAGE INDUCTANCE(@250KHZ, 0.3Vrms 1-6, 9-11, 10-12 SHORT)
2-4 = 3.9uH MAX.
3. TURN TATIO (@10KHZ, 1Vrms) : PIN 2-4 : 11-9 = 8.25±1%
PIN 2-4 : 12-10 = 8.25±1%
4. HI-POT (@1800VAC, 3mA, 1 MIN) : PRI -SEC
PRI- CORE
SEC - CORE
5. RoHS COMPLIANCE

						Atech® Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004	TITLE TRANSFORMER	
							DWG. NO. ATC-06-016R	
	RELEASE	04/07/2006	PAIR	WILL	EUGENE	UNITS: M/M	SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		
REVISIONS						04/07/06	DRAW <i>Pair</i>	