
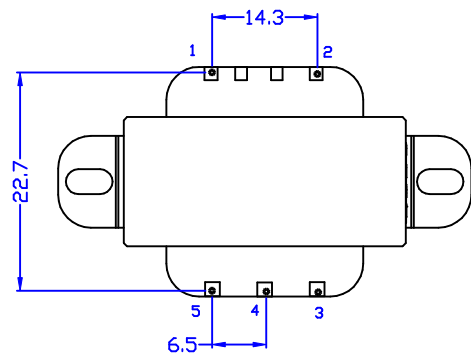
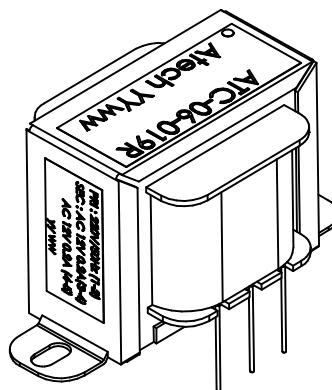
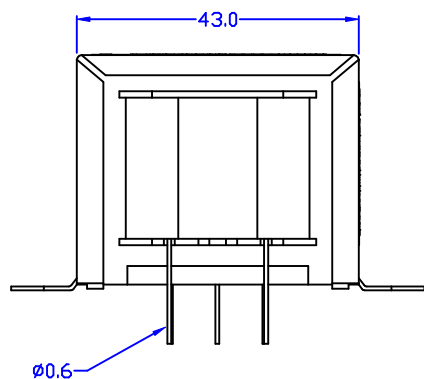
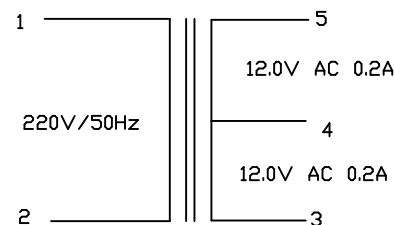
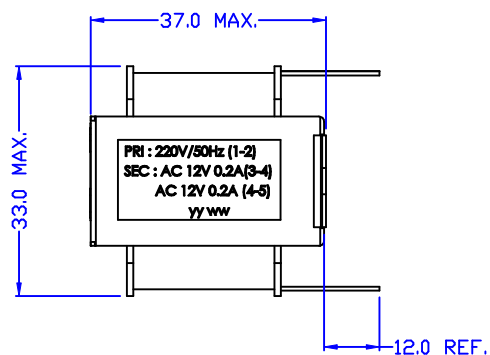


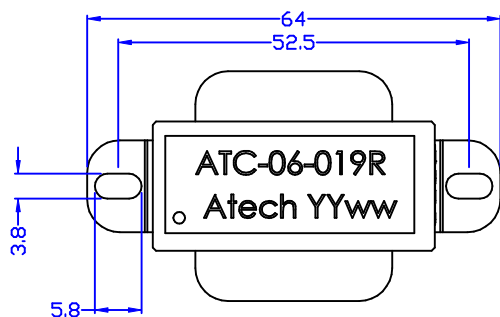

ELECTRICAL CHARACTERISTICS:

1. PRIMARY : 220-240VAC
2. PRIMARY EXCITING CURRENT : 35mA MAX.
3. SECONDARY VOLTAGE(NO LOAD) : 27.0CT VAC $\pm$ 0.6V
4. SECONDARY VOLTAGE(FULL LOAD) : 24.0CT VAC $\pm$ 0.6V
5. RATED SECONDARY CURRENT : 0.2Amp (AC)@60Hz
6. VOLTAGE REGULATION : <15%(VNL-VFL)/(VFL)*100
7. TEMPERATURE RISE : <50°C
8. HI-POT : 2000VAC @50Hz FOR 1 MIN.
COIL TO COIL INSULATION : 200M OHM (MIN.),500VDC
9. RoHS COMPLIANT

						Atech®		TITLE POWER TRANSFORMER	
						Atech Technology Co., Ltd.		DWG. NO.	
						TEL:0212794-6667 FAX:0212794-8004		ATC-06-019R	
RELEASE		05/03/2006	PAIR	AL	EUEGEN	UNITS: M/M		SAFETY	
NO. DESCRIPTION		DATE	BY	CHK	APPD	DATE		P/N:	
REVISIONS						05/03/06		DRAW	
								SHEET 1 OF 1	
								Pair	