
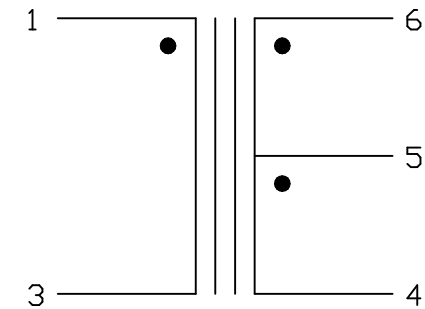


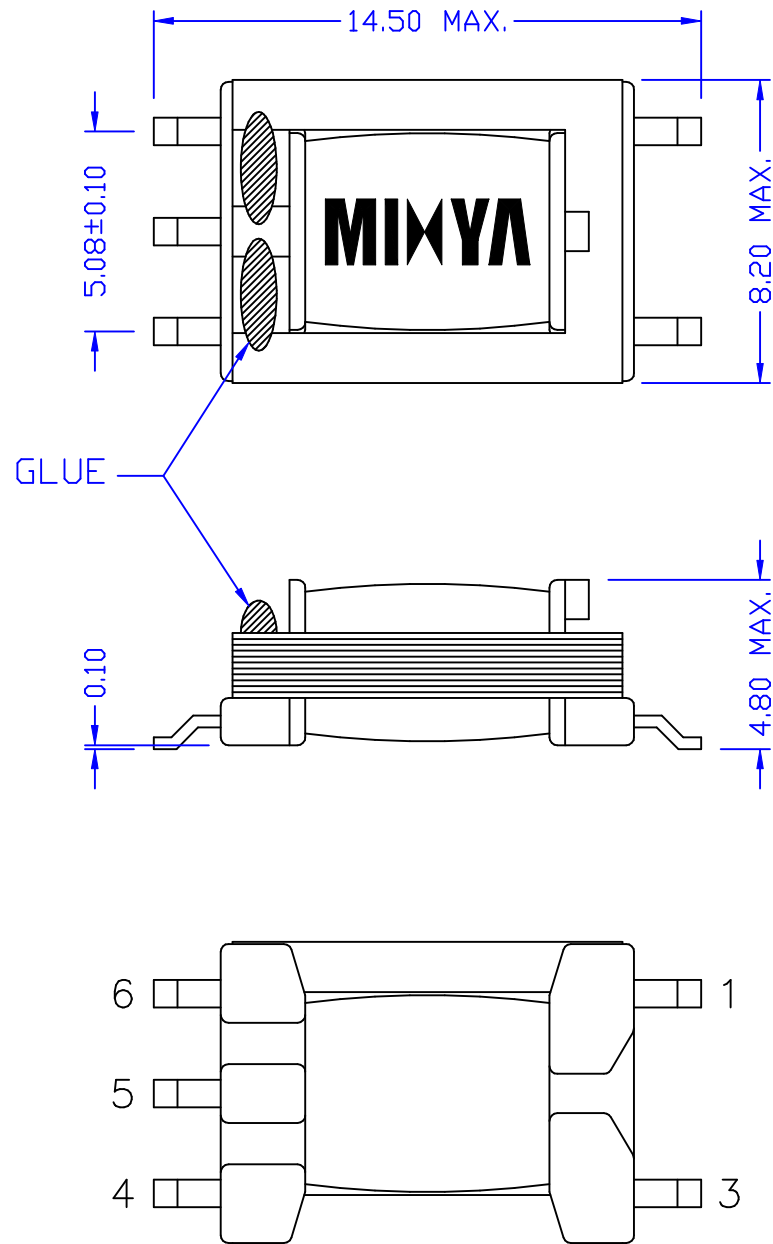

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = 115 Ω HM MAX.
PIN 4-6 = 126 Ω HM MAX.
- INDUCTANCE PARALLEL (@250HZ, 0.5Vrms) : PIN 1-3 = 2.8H MIN.
- INSERTION LOSS (@1KHZ, 0dB) : 4-6 W/H 470 Ω HM LOAD = 2.8dB MAX.
- FREQ. RESP. (REF, 1KHZ) : (@300HZ) = ± 0.5 dB
(@4KHZ) = ± 0.5 dB
- RETURN LOSS (REF 600 Ω HM) : (@300HZ) = 25dB MIN.
(@1KHZ) = 30dB MIN.
(@4KHZ) = 30dB MIN.
- TURN RATIO (@20KHZ, 1Vrms) : PIN 6-4 : PIN 1-3 = $1.06 \pm 2\%$
- HI-POT (@500KVAC, 1mA, 2SEC) : PIN 1-6

						Atech®		TITLE TRANSFORMER	
						Atech Technology Co., Ltd.		DWG. NO.	
						TEL: (02) 2794-6667 FAX: (02) 2794-8004		ATC-06-020	
RELEASE		05/11/2006	PAIR	MIC	EUGENE	UNITS: M/M		SAFETY	
DESCRIPTION		DATE	BY	CHK	APPD	DATE		SHEET 1 OF 1	
REVISIONS						05/11/06		DRAW Pair	