
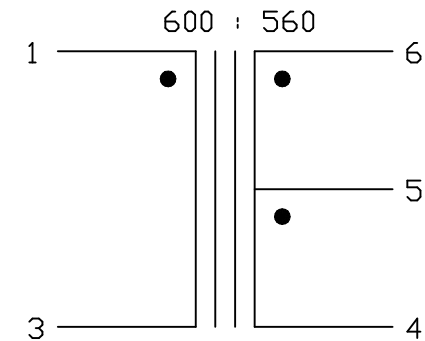


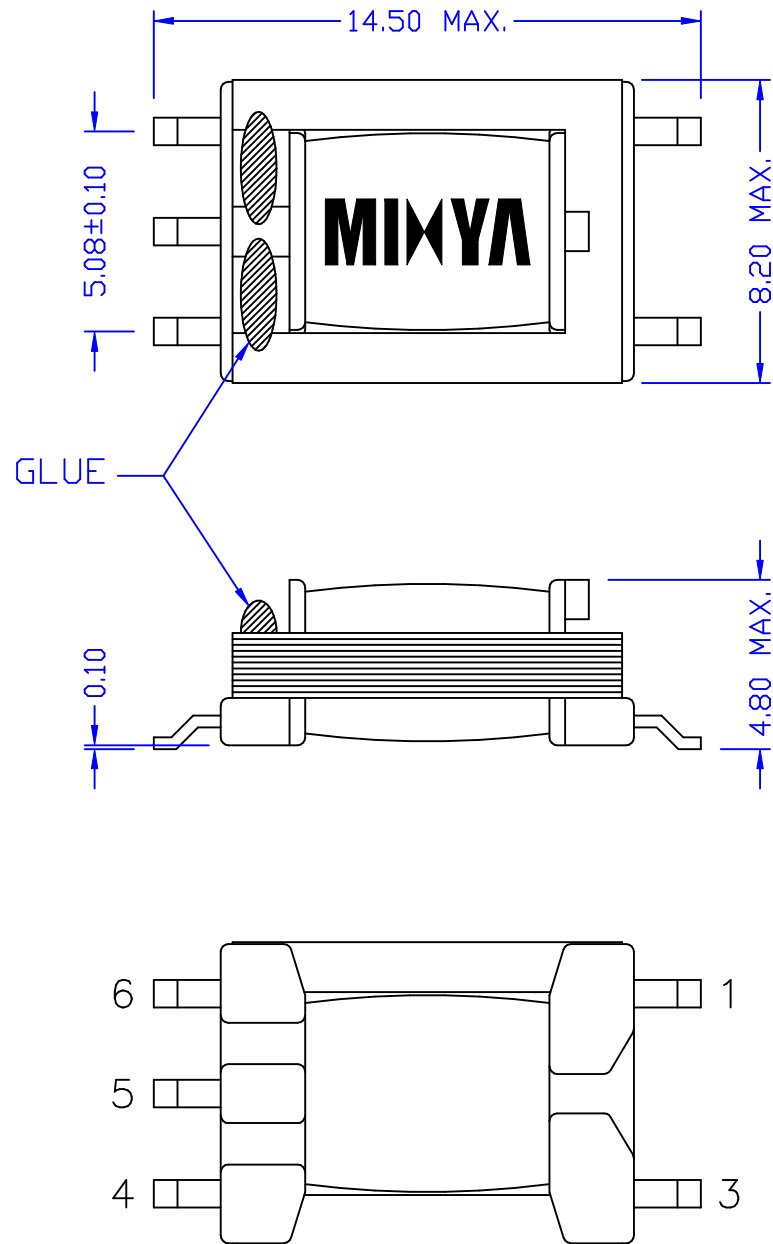

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = 95 Ω HM MAX.
PIN 4-6 = 111 Ω HM MAX.
- INDUCTANCE PARALLEL (@250HZ, 0.5Vrms) : PIN 1-3 = 2.8H MIN.
- INSERTION LOSS (@1KHZ, 0dB) : 4-6 W/H 380 Ω HM LOAD = 2.8dB MAX.
- FREQ. RESP. (REF, 1KHZ) : (@300HZ) = ± 0.5 dB
(@4KHZ) = ± 0.5 dB
- RETURN LOSS (REF 600 Ω HM) : (@300HZ) = 25dB MIN.
(@1KHZ) = 30dB MIN.
(@4KHZ) = 30dB MIN.
- TURN RATIO (@20KHZ, 1Vrms) : PIN 1-3 : PIN 6-4 = $1.03 \pm 2\%$
- HI-POT (@500KVAC, 1mA, 2SEC) : PIN 1-6

						Atech®		TITLE 600 : 560 TRANSFORMER	
						Atech Technology Co., Ltd.		DWG. NO.	
						TEL:0212794-6667 FAX:0212794-8004		ATC-06-021	
RELEASE		05/11/2006	PAIR	MIC	EUGENE	UNITS:		SAFETY	
DESCRIPTION		DATE	BY	CHK	APPD	M/M		SHEET 1 OF 1	
REVISIONS						DATE		DRAW	
						05/11/06		Pair	