

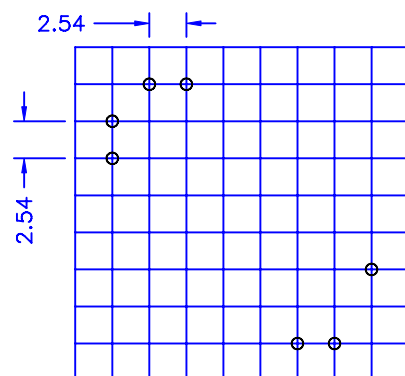


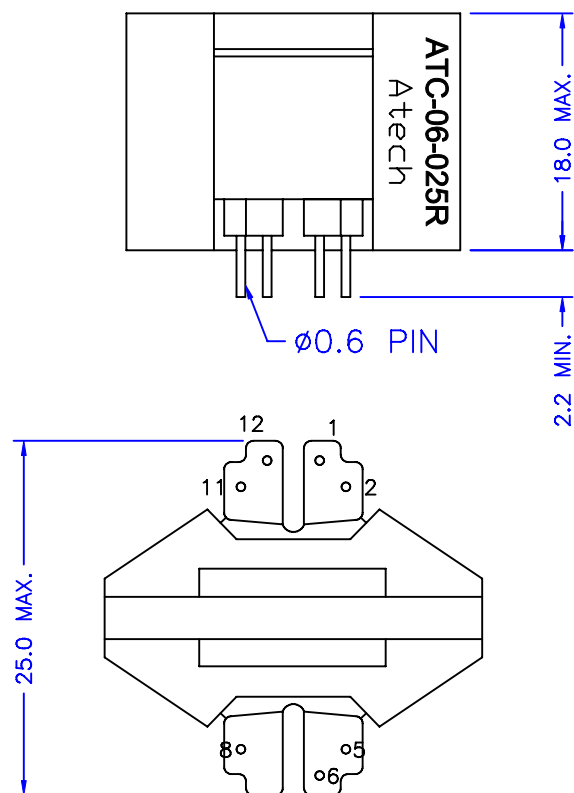

GRID 2.54

$\phi 1.0 \pm 0.1$

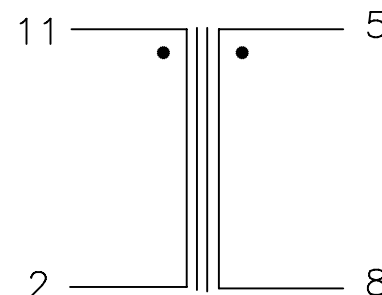

ELECTRICAL CHARACTERISTICS :

1. D.C.R. : PIN 11-2 = 0.37 OHM MAX.
5-8 = 2.0 OHM MAX.
2. INDUCTANCE : (@30KHZ, 0.1Vrms) 5-8 = 14.9mH $\pm 8\%$
11-2 = 0.68mH $\pm 8\%$
3. INTERWINDING CAP (@1KHZ, 0.1Vrms): PIN 2-5 = 80pF MAX.
4. TURN RATIO : (@50KHZ, 0.1Vrms) 5-8 : 11-2 = 4.67 $\pm 1\%$
5. HI-POT : (@1250VAC, 1mA, 2SEC) PRI-SEC-CORE
6. RoHS COMPLIANT

						Atech®		TITLE
						Atech Technology Co., Ltd.		TRANSFORMER
						TEL: (02) 2794-6687 FAX: (02) 2794-8004		DWG. NO.
								ATC-06-025R
A	PIN DIM	01/16/2007	PAIR	MICHAEL	EUGENE	UNITS:	SAFETY	SHEET 1 OF 1
	RELEASE	07/11/2006	DOLLY		SUEDY	M/M		
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW
REVISIONS						07/11/06	CTW808001A	Pair