

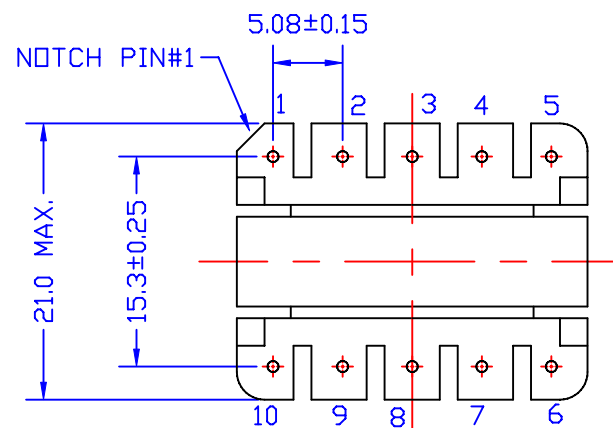


ATC-06-026R
 • Atech

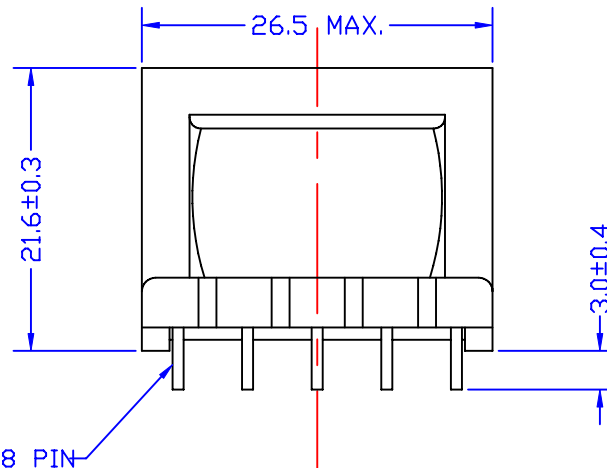

ELECTRICAL CHARACTERISTICS:

1. D.C.R. : PIN 1-5 = 18.5 OHM +/-15%,
PIN 6-10 = 20.5 OHM +/-15%
2. INDUCTANCE (@1KHZ, 0.1Vrms, 2-4 SHORT ALC= OFF) :
PIN 1-5 = 0.7H MIN.
3. INSERTION LOSS :(@1KHZ , 0dB, 2-4,7-9 SHORT)
PIN 1-5 = 0.5dB MAX.= 1.6 dB MAX.
4. FREQUENCY RESPONSE : (@100HZ~15KHZ REF 1KHZ +/-0.5dB) 100HZ, 15KHZ
5. TURNS RATIO (@1KHZ,0.1Vrms,2-4,7-9 SHORT) 1-5 : 10-6 =1.0 +/-2%
6. HI-POT = (@1500 VAC, 1mA, 2SEC) : PRI-SEC
7. RoHS COMPLIANT

					Atech®		TITLE TRANSFORMER	
					Atech Technology Co., Ltd.		DWG. NO. ATC-06-026R	
					TEL: (02) 2794-6667 FAX: (02) 2794-8004			
RELEASE	10/03/2006	PAIR	EUGENE	SUEDY	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO. DESCRIPTION	DATE	BY	CHK	APPD	DATE			DRAW Pair
REVISIONS					10/03/06			