
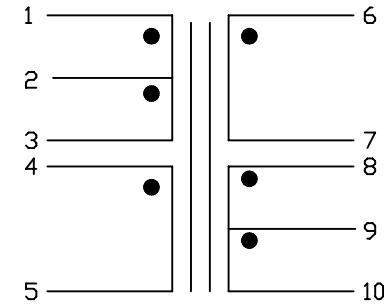
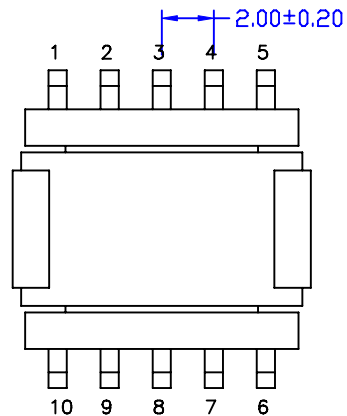

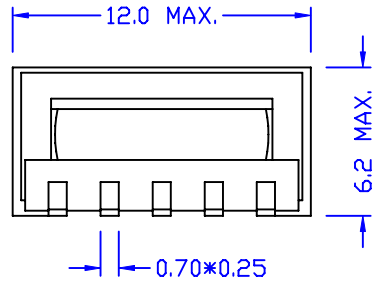


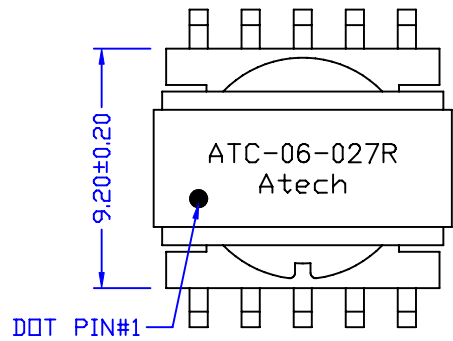

ELECTRICAL CHARACTERISTICS:

1. D.C.R. : PIN 1-3 = 270m Ω HM MAX. PIN 4-5 = 133m Ω HM MAX.
6-7 = 4.3 Ω HM MAX. PIN 8-10 = 246m Ω HM MAX.
2. INDUCTANCE (@ 1 KHZ, 0.25 Vrms, ALC = OFF) :
1-3 = 28uH±20%
4-5 = 1.4uH±30%
6-7 = 561uH±20%
8-10 = 5.0uH±20%
3. TURN RATIO (@6KHZ, 1Vrms) :
6-7 : 1-3 = 4.2±5%
6-7 : 8-10 = 10.5±2%
6-7 : 4-5 = 21±2%
4. HI-POT (@ 100VAC, 1mA, 1MIN, 3-4,7-8 SHORT) PRI-SEC, PRI-CORE,SEC-CORE
5. RoHS COMPLIANT

						Atech® Atech Technology Co., Ltd. TEL:0212794-6667 FAX:0212794-8004	TITLE	
							TRANSFORMER	
A	ELECTRICAL	02/09/2007	PAIR	WILLIE	EUGENE		DWG. NO. ATC-06-027R	
	RELEASE	08/04/2006	PAIR	WILLIE	EUGENE	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N: CTW711007A	DRAW <i>Pair</i>
REVISIONS								