
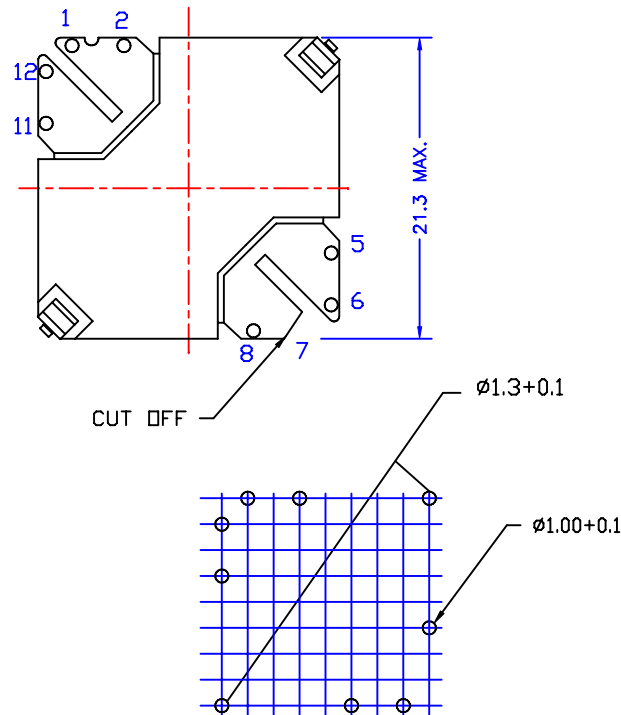



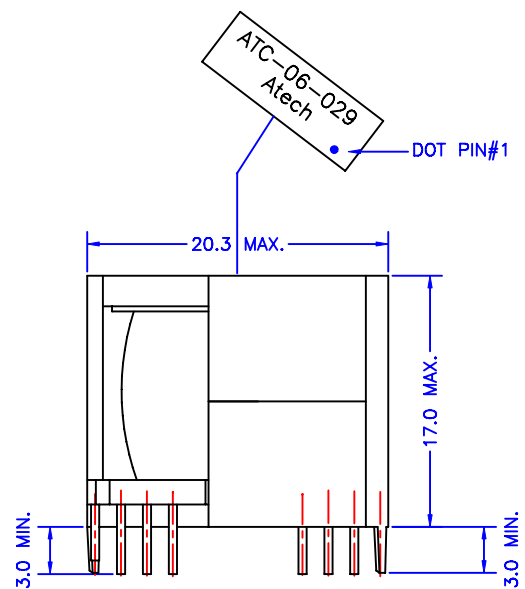

GRID 2.54

ELECTRICAL CHARACTERISTICS :

1. D.C.R.(@6-7 SHORT) : 1-12 = 250HM MAX. 5-8 = 19 OHM MAX.
2. INDUCTANCE(@10KHZ, 1Vrms, 1-5,6-7 SHORT, ALC = OFF)
8-12 = 22.5mH±10%
3. LEAKAGE INDUCTANCE(@100KHZ,1Vrms,6-7, 1-12 SHORT)
5-8 = 110uH MAX.
4. INTERWINDING CAP(@100KHZ,1Vrms, 6-7 SHORT) : 1-8 = 100pF MAX.
5. TURN RATIO(@10KHZ,1Vrms): 12-1 : 5-6 = 1±1%
12-1 : 7-8 = 1± 1%
6. HI-POT(@1500VAC,1mA,2SEC, 6-7 SHORT) : PRI-SEC
7. RoHS COMPLIANT

						Atech[®] Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE TRANSFORMER	
							DWG. NO. ATC-06-029R	
	RELEASE	09/22/2006	PAIR		SUEDY		SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	SHEET 1 OF 1		
REVISIONS						DATE	DRAW <i>Pair</i>	
						09/22/06		