


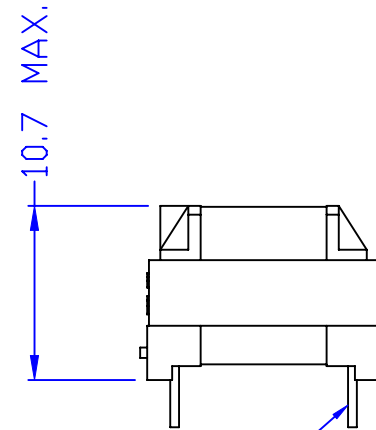
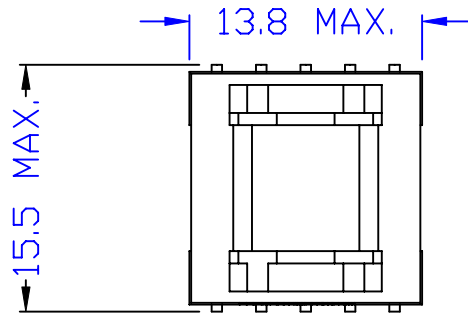



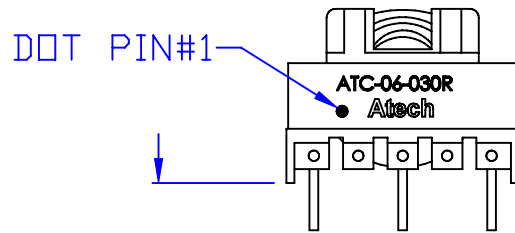

0.5 SQ. PIN.

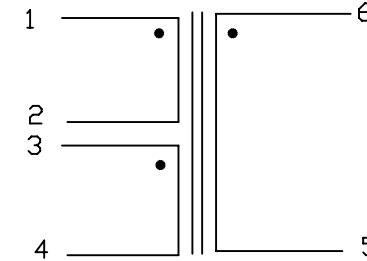

3.5 ± 0.6

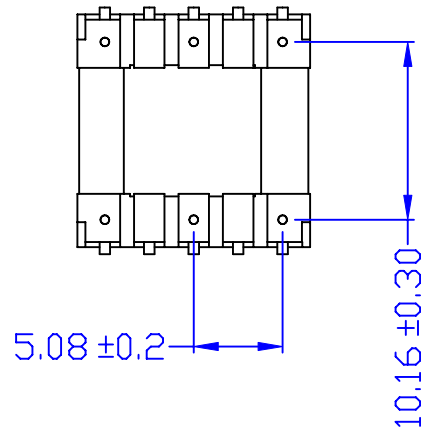

ELECTRICAL CHARACTERISTICS:

1. D.C.R. : PIN 1-2 = 1.4 Ω M MAX.
PIN 3-4 = 3.2 Ω M MAX.
PIN 5-6 = 55m Ω M MAX.
2. INDUCTANCE (@1KHZ, 0.1Vrms, 2-3,4-6 SHORT ALC = OFF)
PIN 1-5 = 525 μ H +/-10%
3. TURNS RATIO (@100KHZ, 0.1Vrms)
PIN 1-2 : 6-5 = 5 +/-4%
PIN 1-2 : 3-4 = 2 +/-2%
4. HI-POT (@500VAC, 1mA, 2SEC) PIN 1-2 , PIN 1-5
5. RoHS COMPLIANT

						Atech® Atech Technology Co., Ltd. TEL: 02-2794-6667 FAX: 02-2794-8004	TITLE TRANSFORMER	
							DWG. NO. ATC-06-030R	
	RELEASE	10/02/2006	PAIR	WILLIE	EUEGEN		UNITS: M/M	SAFETY
NO.	DESCRIPTION	DATE	BY	CHK	APPD		DATE 01/02/06	P/N:
REVISIONS						SHEET 1 OF 1		DRAW <i>Pair</i>