
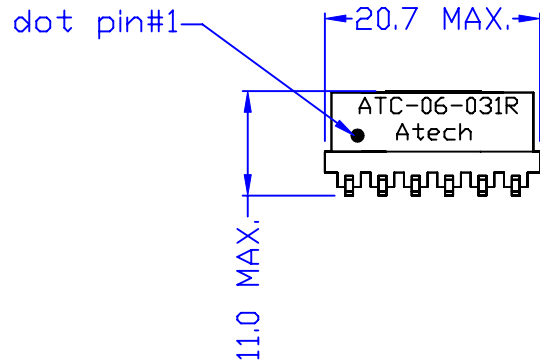
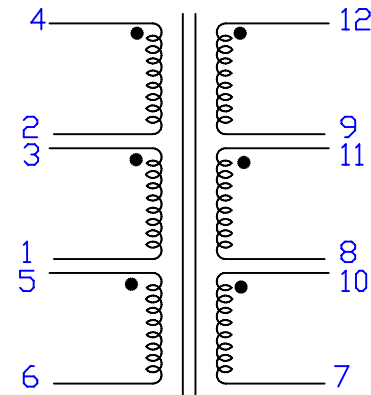

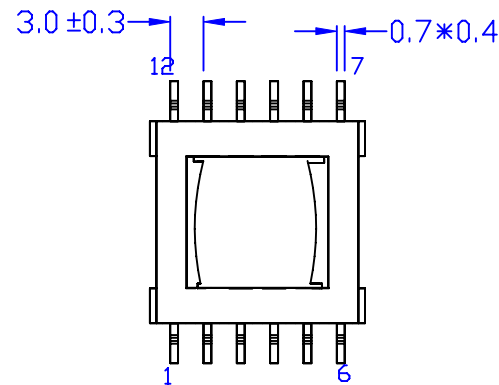




ELECTRICAL CHARACTERISTICS:

1. D.C.R : 1-2,3-4,7-8-9,10-11-12 short) 1-3 = 70m OHM MAX.
7-10 = 2.3m OHM MAX. 5-6 = 220M ohm max.
2. INDUCTANCE(@250KHZ, 0.7Vrms): 1-3 = 42uH+/-10%(1-2,3-4 SHORT ,ALC OFF)
3. LEAKAGE INDUCTANCE(@250KHZ,0.7Vrms)
(1-2,3-4, 5-6,7-8-9-10-11-12 SHORT)1-3 = 1.7uH MAX.
4. TURN RATIO(@250KHZ,0.7Vrms 1-2, 3-4, 7-8-9, 10-11-12 SHORT)
1-3 : 5-6 = 3.33+/-2% 1-3 : 7-10 = 10±2%
5. HI-POT(@1500VAC,1mA,2SEC. 1-2, 3-4, 7-8-9 , 10-11-12 SHORT) 5-1 , 5-7
6. RoHS COMPLIANT

						Atech® Atech Technology Co., Ltd. TEL:0212794-6667 FAX:0212794-8004		TITLE	TRANSFORMER
								DWG. NO.	ATC-06-031R
	RELEASE	10/04/2006	PAIR	WILLIE	EUEGEN	UNITS:	SAFETY		SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	M/M	P/N:		DRAW
REVISIONS						10/04/06			<i>Pair</i>