
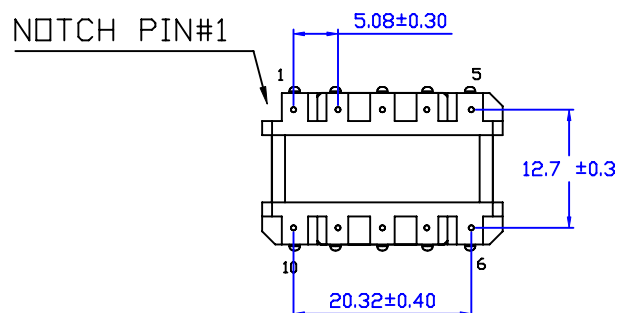
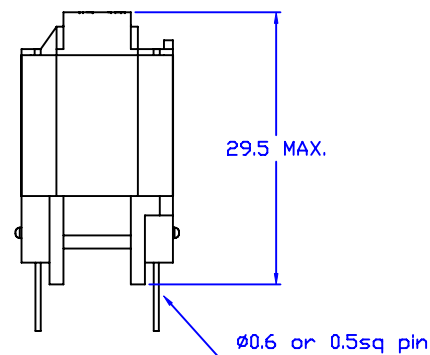
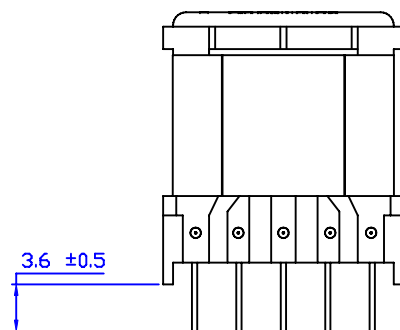
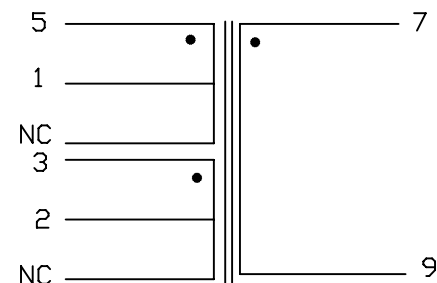
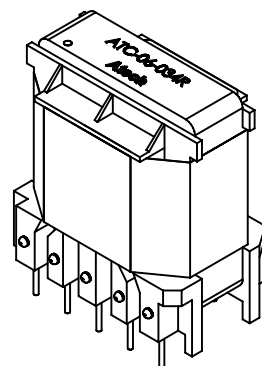


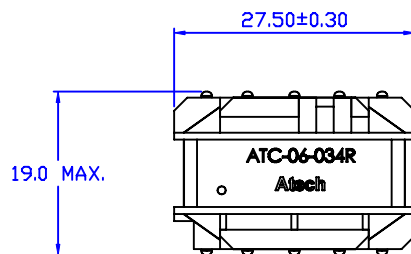

## ELECTRICAL CHARACTERISTICS:

1. D.C.R. : 5-1 = 18  $\Omega$ HM MAX.  
3-2 = 0.58  $\Omega$ HM MAX.  
7-9 = 0.24  $\Omega$ HM MAX.
2. INDUCTANCE (@1KHZ, 0.1Vrms ALC=OFF) : 5-1 = 2.3mH +/-10%
3. TURN RATIO (@10KHZ, 0.1Vrms) : 5-1 : 7-9 = 8.75+/-2%  
5-1 : 3-2 = 8.07 +/-2%
4. HI-POT (@1500VAC, 1mA 1-2 SHORT) : PRI - SEC.
5. RoHS COMPLIANT

|                 |  |            |      |        |        |                               |        |              |
|-----------------|--|------------|------|--------|--------|-------------------------------|--------|--------------|
|                 |  |            |      |        |        | <b>Atech®</b>                 |        | TITLE        |
|                 |  |            |      |        |        | Atech Technology Co. Ltd.     |        | TRANSFORMER  |
|                 |  |            |      |        |        | TEL:02794-6667 FAX:02794-8004 |        | DWG. NO.     |
|                 |  |            |      |        |        |                               |        | ATC-06-034R  |
| RELEASE         |  | 11/14/2006 | PAIR | WILLIE | EUEGEN | UNITS:                        | SAFETY | SHEET 1 OF 1 |
| NO. DESCRIPTION |  | DATE       | BY   | CHK    | APPD   | M/M                           |        |              |
| REVISIONS       |  |            |      |        |        | DATE                          | P/N:   | DRAW         |
|                 |  |            |      |        |        | 11/14/06                      |        | Pair         |