
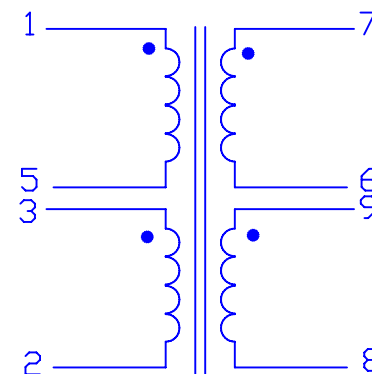
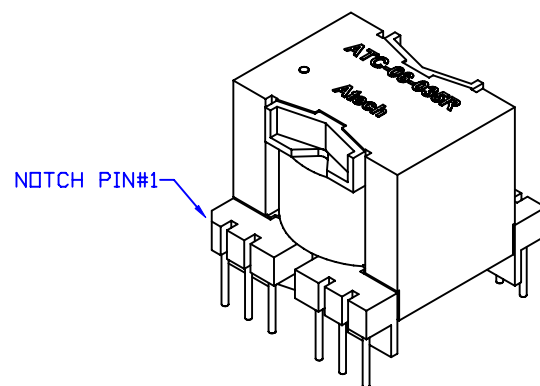
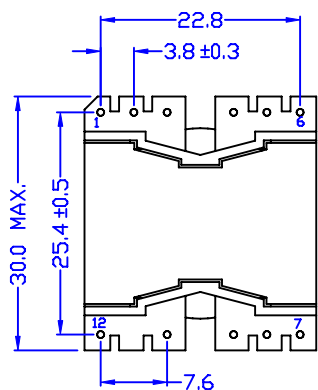
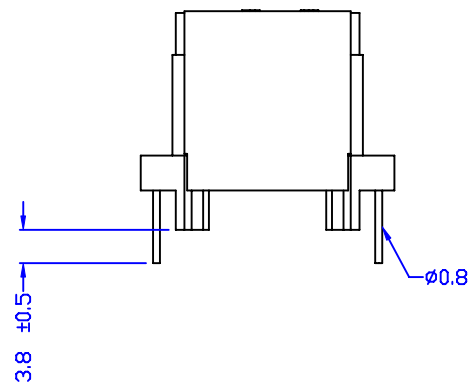




ELECTRICAL CHARACTERISTICS:

- 1.D.C.R : 1-5 = 0.2OHM MAX. 2-3 = 0.32 OHM NMAX.
6-7 = 8.8 OHM MAX. 8-9 - 0.85 OHM MAX.
2. INDUCTANCE(@1KHZ,0.1Vrms,ALC = OFF) : 1-5 = 0.65mH MIN
2-3 = 1.2mH MIN.
6-7 = 250mH MIN.
8-9 = 1.2mH MIN.
3. TURN RATIO(@40 KHZ, 0.1Vrms) : 7-6 : 1-5 = 17.8±2%
7-6 : 3-2 = 13.8±2%
7-6 : 9-8 = 12.4±2%
4. HI-POT(@1500VAC,1mA,.2SEC) 7-1 , 7-2 , 7-8
5. RoHS COMPLIANT

						Atech® Atech Technology Co., Ltd. TEL:0212794-6667 FAX:0212794-8004		TITLE TRANSFORMER
								DWG. NO. ATC-06-035R
	RELEASE	11/21/2006	PAIR	WILLIE	EUEGEN	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW <i>Pair</i>
REVISIONS						11/21/06		